


**CONFIDENTIAL & PROPRIETARY**  
 THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO LAIRD TECHNOLOGIES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN AUTHORIZED PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM LAIRD TECHNOLOGIES.



- NOTES:
1. FOAM: HF-1
  2. FABRIC: NICKEL NRS FR
  3. TAPE: 1/4" TAPE HI-TEMP
  4. LINER: 1/2" EXTENDED RELEASE LINER
  5. FABRIC SEAM LOCATION MAY VARY.

<b>REVISIONS:</b>		TITLE:		DRAWN		DATE		SCALE:		DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS:		<table border="0"> <tr> <td></td> <td><b>DECIMALS</b></td> <td><b>TENTHS</b></td> </tr> <tr> <td>XX</td> <td>± .03</td> <td>0" - 4" ± .030</td> </tr> <tr> <td>XXX</td> <td>± .020</td> <td>6" - 11" ± .050</td> </tr> <tr> <td></td> <td><b>ANGLES</b></td> <td>11" - 48" ± .100°</td> </tr> <tr> <td></td> <td></td> <td>48" - 70" ± .187°</td> </tr> <tr> <td></td> <td></td> <td>70" - 144 ± .250°</td> </tr> <tr> <td></td> <td></td> <td>± 1/2</td> </tr> </table>		<b>DECIMALS</b>	<b>TENTHS</b>	XX	± .03	0" - 4" ± .030	XXX	± .020	6" - 11" ± .050		<b>ANGLES</b>	11" - 48" ± .100°			48" - 70" ± .187°			70" - 144 ± .250°			± 1/2
	<b>DECIMALS</b>	<b>TENTHS</b>																															
XX	± .03	0" - 4" ± .030																															
XXX	± .020	6" - 11" ± .050																															
	<b>ANGLES</b>	11" - 48" ± .100°																															
		48" - 70" ± .187°																															
		70" - 144 ± .250°																															
		± 1/2																															
1. FOAM WAS 2170S05, NOW IS 6750S00	12/17/99	JMC	SHIELDING GASKET		C.SAUNDERS	8/22/99	1/1	DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS:		<table border="0"> <tr> <td></td> <td><b>DECIMALS</b></td> <td><b>TENTHS</b></td> </tr> <tr> <td>XX</td> <td>± .03</td> <td>0" - 4" ± .030</td> </tr> <tr> <td>XXX</td> <td>± .020</td> <td>6" - 11" ± .050</td> </tr> <tr> <td></td> <td><b>ANGLES</b></td> <td>11" - 48" ± .100°</td> </tr> <tr> <td></td> <td></td> <td>48" - 70" ± .187°</td> </tr> <tr> <td></td> <td></td> <td>70" - 144 ± .250°</td> </tr> <tr> <td></td> <td></td> <td>± 1/2</td> </tr> </table>		<b>DECIMALS</b>	<b>TENTHS</b>	XX	± .03	0" - 4" ± .030	XXX	± .020	6" - 11" ± .050		<b>ANGLES</b>	11" - 48" ± .100°			48" - 70" ± .187°			70" - 144 ± .250°			± 1/2		
	<b>DECIMALS</b>	<b>TENTHS</b>																															
XX	± .03	0" - 4" ± .030																															
XXX	± .020	6" - 11" ± .050																															
	<b>ANGLES</b>	11" - 48" ± .100°																															
		48" - 70" ± .187°																															
		70" - 144 ± .250°																															
		± 1/2																															
2. ADDED GLASS 2/28/00	AL 3. CHANGED FABRIC LENGTH 3/9/00	AL	Dwg. or Part No.	REV.	CHECKED BY:	DATE	DATE	DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS:		<table border="0"> <tr> <td></td> <td><b>DECIMALS</b></td> <td><b>TENTHS</b></td> </tr> <tr> <td>XX</td> <td>± .03</td> <td>0" - 4" ± .030</td> </tr> <tr> <td>XXX</td> <td>± .020</td> <td>6" - 11" ± .050</td> </tr> <tr> <td></td> <td><b>ANGLES</b></td> <td>11" - 48" ± .100°</td> </tr> <tr> <td></td> <td></td> <td>48" - 70" ± .187°</td> </tr> <tr> <td></td> <td></td> <td>70" - 144 ± .250°</td> </tr> <tr> <td></td> <td></td> <td>± 1/2</td> </tr> </table>		<b>DECIMALS</b>	<b>TENTHS</b>	XX	± .03	0" - 4" ± .030	XXX	± .020	6" - 11" ± .050		<b>ANGLES</b>	11" - 48" ± .100°			48" - 70" ± .187°			70" - 144 ± .250°			± 1/2		
	<b>DECIMALS</b>	<b>TENTHS</b>																															
XX	± .03	0" - 4" ± .030																															
XXX	± .020	6" - 11" ± .050																															
	<b>ANGLES</b>	11" - 48" ± .100°																															
		48" - 70" ± .187°																															
		70" - 144 ± .250°																															
		± 1/2																															
3. UPDATED FOAM AND FORMAT 1/16/01	D.D.G		4105-AB-51K	3	DWG	2/17/00	2/17/00	DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS:		<table border="0"> <tr> <td></td> <td><b>DECIMALS</b></td> <td><b>TENTHS</b></td> </tr> <tr> <td>XX</td> <td>± .03</td> <td>0" - 4" ± .030</td> </tr> <tr> <td>XXX</td> <td>± .020</td> <td>6" - 11" ± .050</td> </tr> <tr> <td></td> <td><b>ANGLES</b></td> <td>11" - 48" ± .100°</td> </tr> <tr> <td></td> <td></td> <td>48" - 70" ± .187°</td> </tr> <tr> <td></td> <td></td> <td>70" - 144 ± .250°</td> </tr> <tr> <td></td> <td></td> <td>± 1/2</td> </tr> </table>		<b>DECIMALS</b>	<b>TENTHS</b>	XX	± .03	0" - 4" ± .030	XXX	± .020	6" - 11" ± .050		<b>ANGLES</b>	11" - 48" ± .100°			48" - 70" ± .187°			70" - 144 ± .250°			± 1/2		
	<b>DECIMALS</b>	<b>TENTHS</b>																															
XX	± .03	0" - 4" ± .030																															
XXX	± .020	6" - 11" ± .050																															
	<b>ANGLES</b>	11" - 48" ± .100°																															
		48" - 70" ± .187°																															
		70" - 144 ± .250°																															
		± 1/2																															

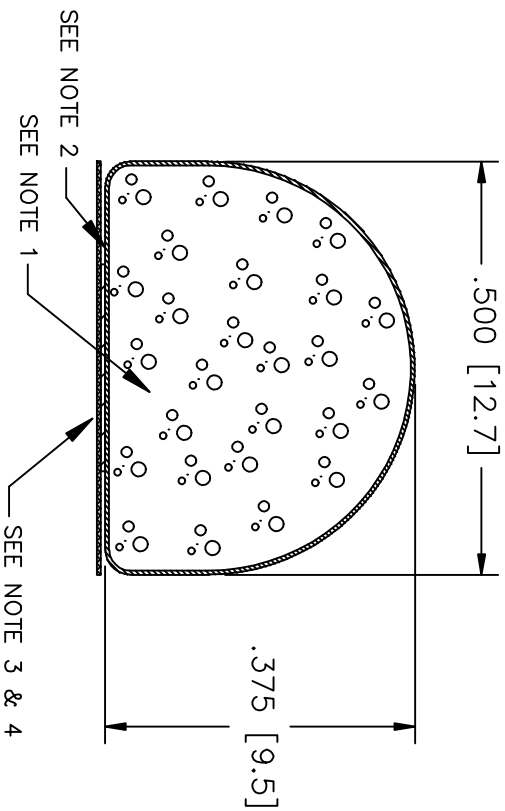