


RoHS compliant

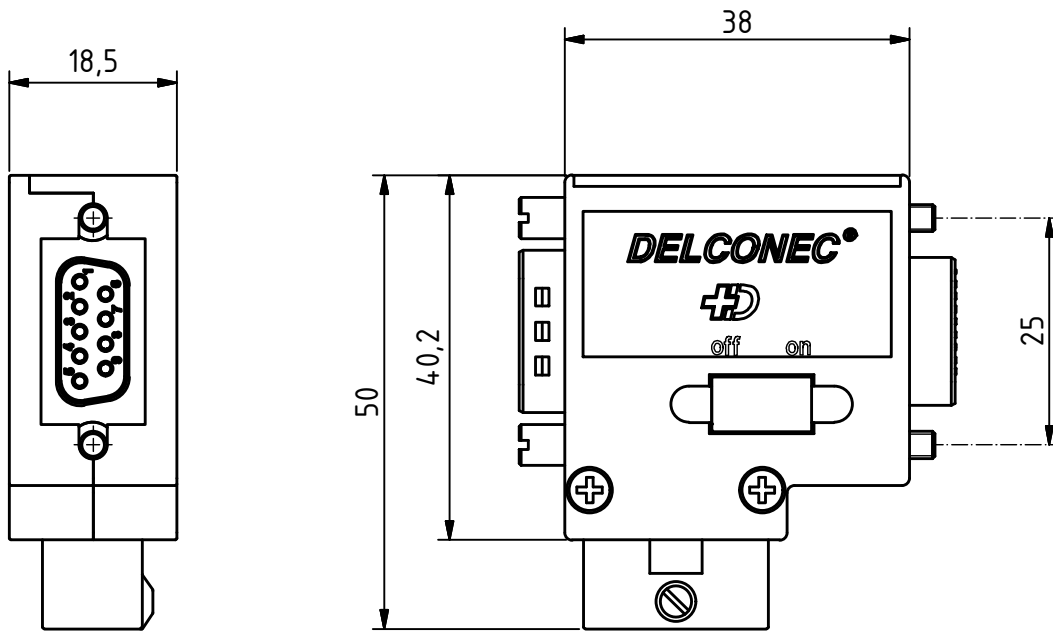

**MATERIALS**

- Hood: Thermoplastic black

**CHARACTERISTICS**

- With test control unit
- Connector with switchable resistor network (On/Off)
- Terminals, rigid 0.14 to 0.5mm<sup>2</sup>, flexible 0.14 to 0.5mm<sup>2</sup>
- Temperature range -25°C to +85°C

	All dimensions in mm	Rev.	Rev.	Rev.	DE006600 part no.		
		Rev.	Rev.	Rev.			
CB-PG DELCONEC				1.2:1 scale	drawn	08.05.2015	mw
					checked		
					approved		
		Industrie Neuhof 8c CH-3422 Kirchberg <a href="http://www.d-sub.swiss">www.d-sub.swiss</a>		K061978 drawing no.			