


Material:

- ⚠️ ⚠️ * Insulation: PBT With 30% G.F. UL 94V-0
- * Contact: Brass

Ordering Code:

CB91 ** 2 H 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
- ④ Tail Style: H= Right angle
- ⑤ Color: 1= Black
- ⑥ Other options: 00= Standard

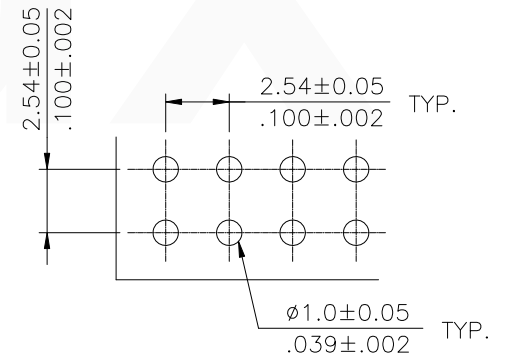

Recommended P.C. Board Layout

A = 2.54 * No. of Spaces
 B = A + 3.04
 * Available in 4 through 80 circuits

PIN	Tolerance
04~40	±0.20
42~80	±0.35

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW BOARD MOUNT CONNECTOR	瀚荃股份有限公司 CviLux Corporation									
6	Karen	9/23-19'	ECNT119300/ECRS119004	CVILUX 2019.11.07 ISSUED	DRAWN BY:	Karen	11/1-19'	MATERIAL:	DRAWING NO.	CB9102SL	PART NO.	CB91**2H100					
5	Enya	1/25-13'	ECN13024-0/ECR12113-0		ENGINEER:	Sun	11/1-19'						FINISH:				
4	Enya	10/22-12'	ECN12256-0/ECR12081-0		CHECKED BY:	Eisley	11/5-19'							SCALE	3 / 1	SHEET	1 OF 1
3	Sun	1/22-07'	ECN07036		APPROVED BY:	Eisley	11/5-19'										
							TOLERANCE UNLESS OTHERWISE SPECIFIED										
							.X ± 0.25/.010 X.* ± 3'										
							.XX ± 0.20/.008 .X.* ±										
							.XXX ± 0.10/.004 .XX.* ±										