

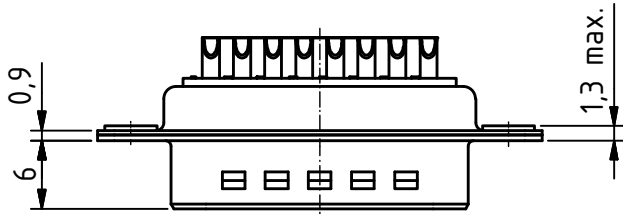
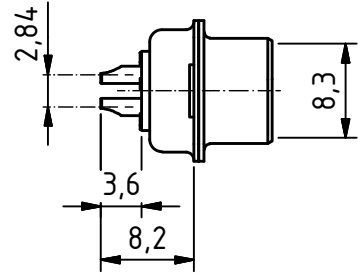


RoHS compliant

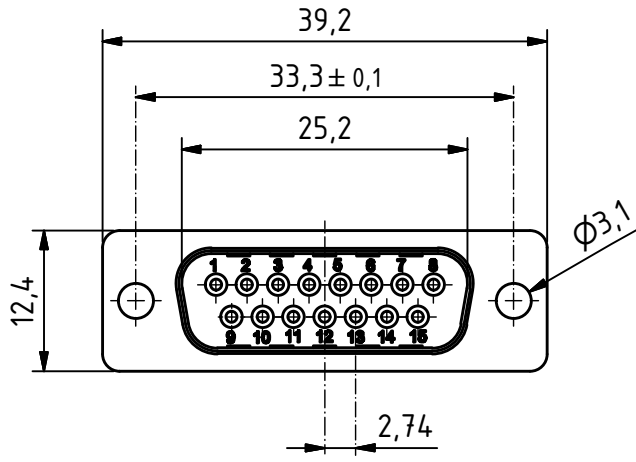

suitable for cable AWG 18 (single solid wire)

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)			
size in mm	> 0.5	> 3	> 6
up to 3	±0.1	±0.2	±0.2
up to 6			
up to 30			
up to 120			
Tolerances			
			±0.3

	All dimensions in mm	Rev.	Rev.	Rev.	DE001223		
		Rev.	Rev.	Rev.	part no.		
DTS15PZ/2				1.5:1	drawn	03.11.2009	mr
					checked		
				1.5:1	approved		
					K050007		
Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss					drawing no.		