
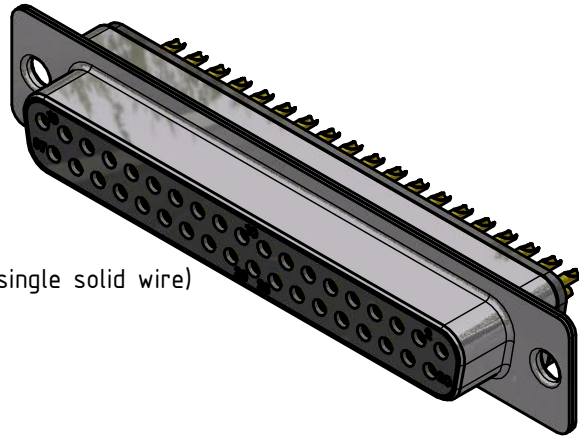
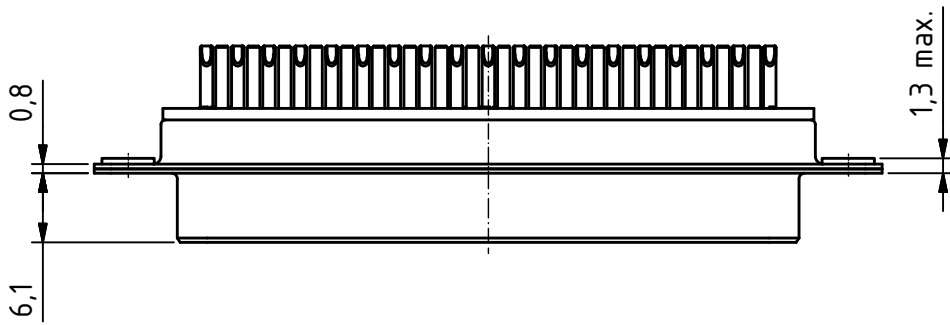


RoHS compliant

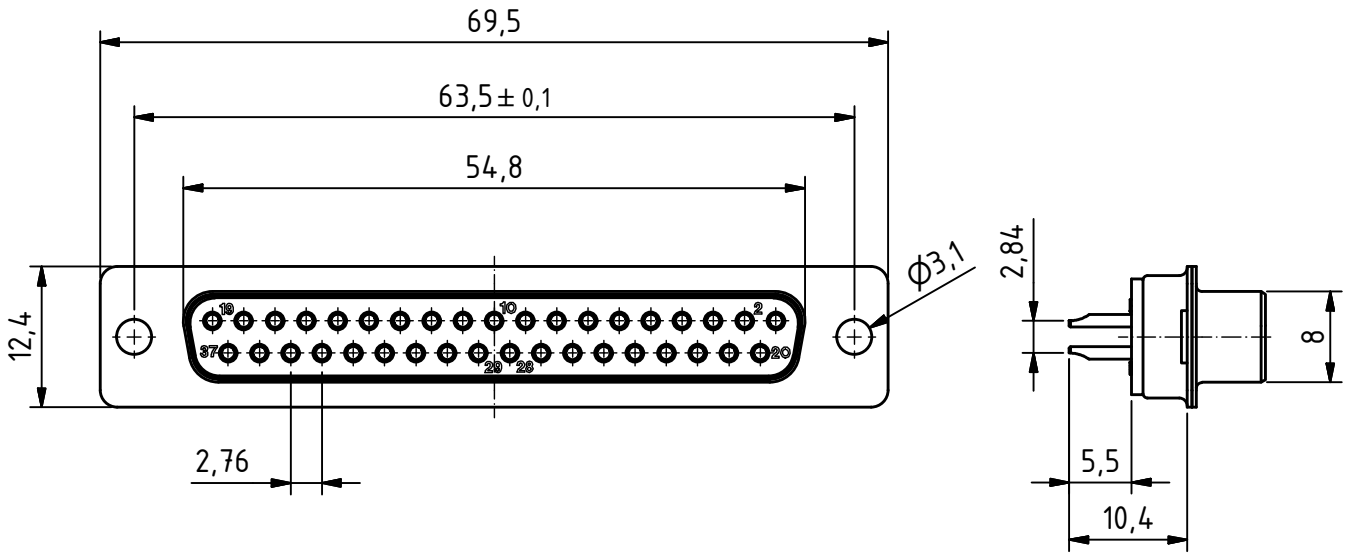

suitable for cable AWG 22 (single solid wire)

Capacitor value 1'000 pF

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 black
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 100V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >1GΩ
- Temperature range: -55° to +125°C

| | | | |
|----------------------------------------------|-------------------|----------------|-----------------|
| General tolerances (Deitron standard) | | | |
| size in mm | > 0.5 up to 3 | > 3 up to 6 | > 6 up to 30 |
| | > 30 up to 120 | | |
| tolerances | ±0.1 | ±0.2 | ±0.2 |
| | | | ±0.3 |

| | | | | | | | |
|--------------|----------------------|------|------|--------------------------------------------------------------------------------------------------|----------|-------------|----|
| | All dimensions in mm | Rev. | Rev. | Rev. | DE002756 | | |
| | | Rev. | Rev. | Rev. | part no. | | |
| D37SZ/2FP102 | | | | 1.5:1 scale | drawn | 06.11.2007 | mr |
| | | | | | checked | | |
| | | | | | approved | | |
| | | | | Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss | | K052012 | |
| | | | | | | drawing no. | |