
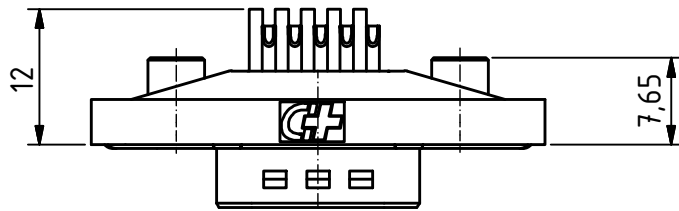



RoHS compliant

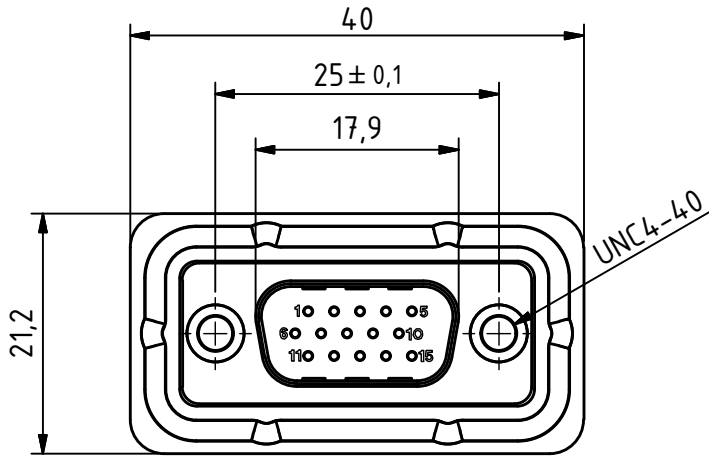

suitable for cable AWG 20 (single solid wire)

Waterproof IP68  
Frame with O-ring sealing for back panel mounting

**MATERIALS**

- Insulator: Thermoplastic UL 94-V-0 white
- Frame: Zinc diecasting nickel plated
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

**CHARAKTERISTICS**

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

| General tolerances (Deltron standard) |                  |                |                 |
|---------------------------------------|------------------|----------------|-----------------|
| size in mm                            | tolerances       |                |                 |
|                                       | > 0.5<br>up to 3 | > 3<br>up to 6 | > 6<br>up to 30 |
| ±0.1                                  | ±0.2             | ±0.2           | ±0.3            |

|                   |                      |      |      |  |          |             |    |
|-------------------|----------------------|------|------|--|----------|-------------|----|
|                   | All dimensions in mm | Rev. | Rev. | Rev.   | DE017078 |             |    |
|                   |                      | Rev. | Rev. | Rev.   | part no. |             |    |
| HD-DWM15PZ/2M85UN |                      |      |      | 1.5:1<br>scale   | drawn    | 19.11.2015  | mw |
|                   |                      |      |      |  | checked  |             |    |
|                   |                      |      |      | approved   |          |             |    |
|                   |                      |      |      | Industrie Neuhof 8c<br>CH-3422 Kirchberg<br><a href="http://www.d-sub.swiss">www.d-sub.swiss</a> |          | K062352     |    |
|                   |                      |      |      |  |          | drawing no. |    |