
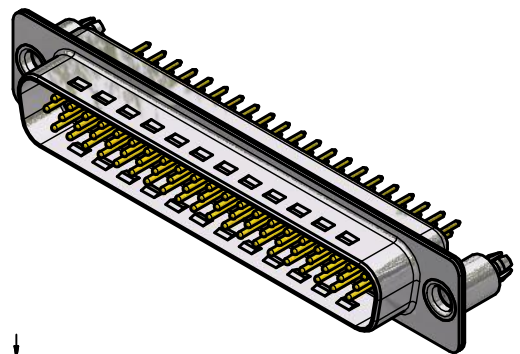
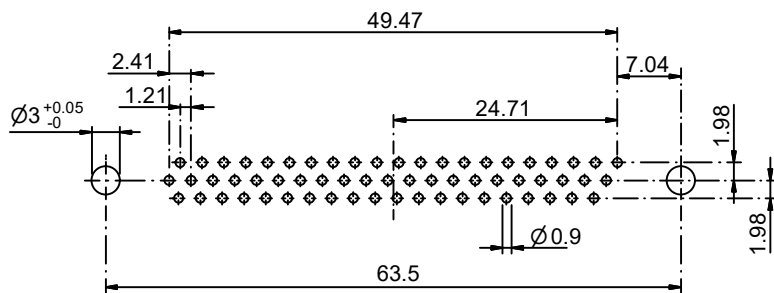
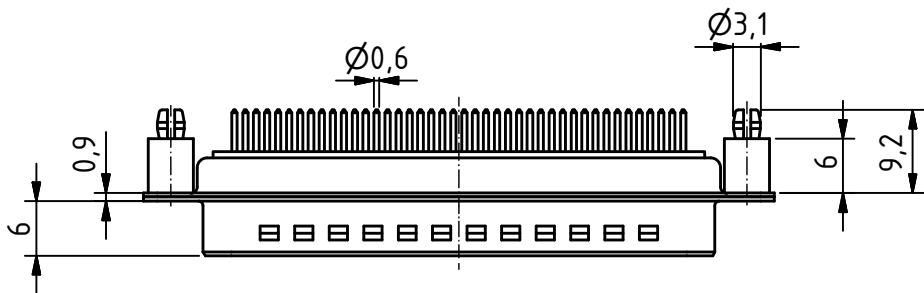



RoHS compliant

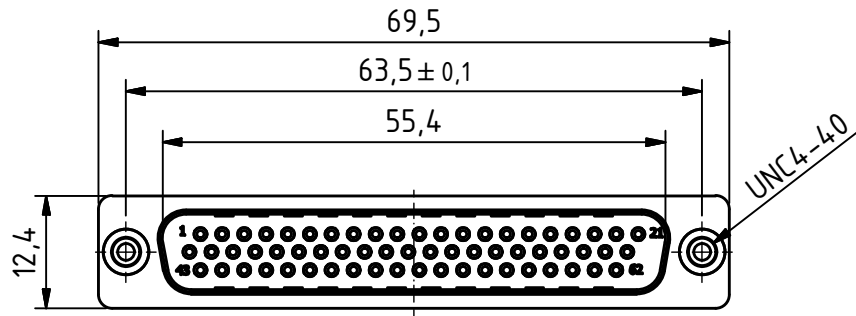

PCB Layout tolerances +/-0.1

General tolerances (Deltron standard)	size in mm			
	> 0.5	up to 3	up to 6	up to 120
	> 3	up to 6	up to 30	up to 120
	> 6	up to 30	up to 120	up to 120
	tolerances			
		±0.1	±0.2	±0.3

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

	All dimensions in mm	Rev.	Rev.	Rev.	DE013197		
		Rev.	Rev.	Rev.	part no.		
HD-D62PY/2M86UN				1.2:1 scale	drawn	09.01.2019	mw
					checked		
					approved		
				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K063337	
						drawing no.	