
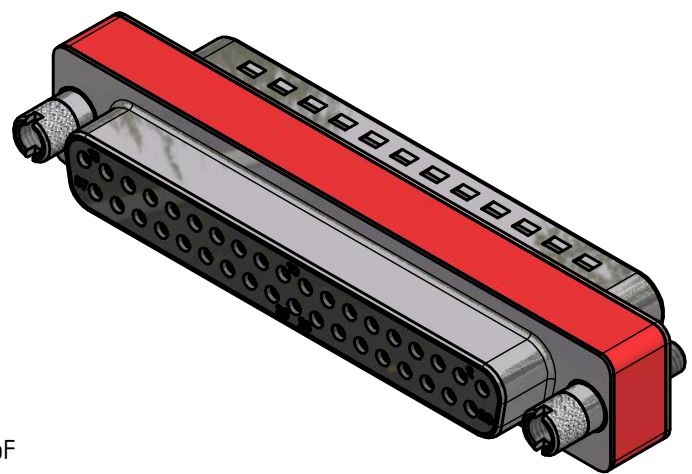
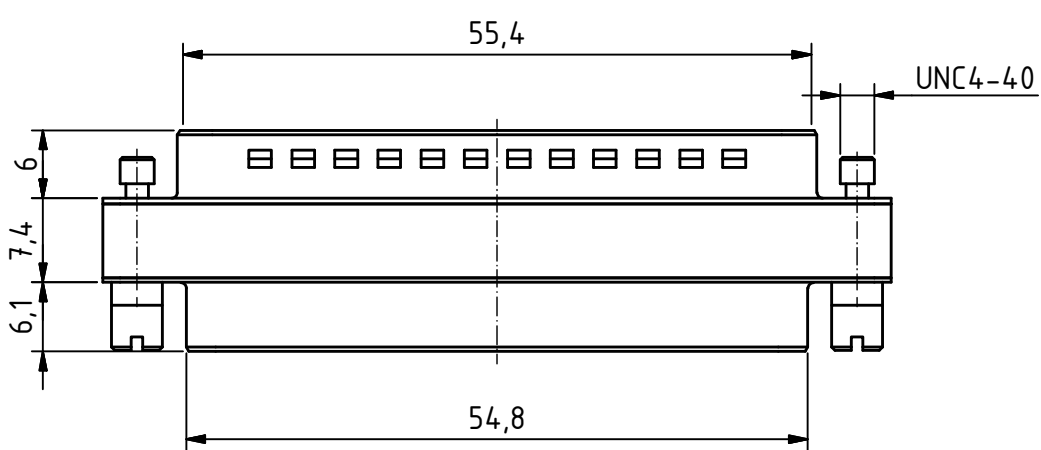
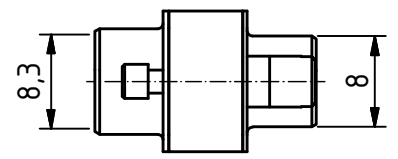


RoHS compliant

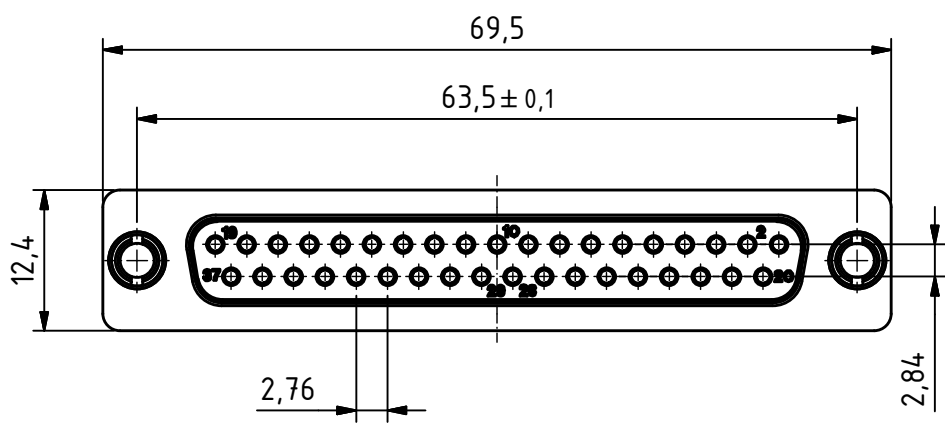

Capacitor value 1'000 pF

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 black
- Frame: Thermoplastic UL 94-V-0 red
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 100V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >1GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)	size in mm	> 0.5	> 3	> 6	> 30
		up to 3	up to 6	up to 30	up to 120
	tolerances	±0.1	±0.2	±0.2	±0.3

	All dimensions in mm	Rev.	Rev.	Rev.	DE005682		
		Rev.	Rev.	Rev.	part no.		
DFA37S/37P/2FP102UN				1.5:1	drawn	14.01.2019	rop
				scale	checked		
					approved		
				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K063363	
						drawing no.	