

**Technical Data:**

Material: Aluminum foil PVC + POM +tinned copper wire

Thickness: 0.22mm

Working Temperature: -15°C-60°C

Flammability: UL94-VTM-0

Certificate: ROHS

Standard Color: Black and Sliver

Packaging: Box

**Features:**

High shielding effect

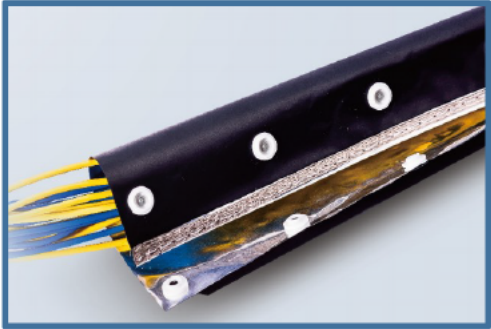
Easy to assemble and disassemble

With ground wire

POM button closure

Laminated aluminum foil

**Specifications:**

Part No.	Band Width (mm)	Button Distance (mm)	Max. Bundle Dia. (mm)	Packing (M/R)	Picture
MX-FAB-010	70	40	10	25	
MX-FAB-015	90	60	15	25	
MX-FAB-020	105	75	20	25	
MX-FAB-025	115	85	25	25	
MX-FAB-030	130	100	30	25	
MX-FAB-040	160	130	40	25	
MX-FAB-050	190	160	50	25	
MX-FAB-070	255	225	70	25	
MX-FAB-100	348	318	100	25	

**Part Numbering Systems:**

Patron EMC MX-FAX-xxx