

15W, AC-DC converter



## FEATURES

- 85 - 264V Universal AC or wide 100 - 370VDC Input
- Operating ambient temperature range: -40°C to +85°C
- High I/O isolation test voltage of up to 4000VAC
- Regulated output, low ripple & noise
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Plastic case meets flammability per UL94V-0
- EMC performance meets CISPR32 / EN55032 CLASS B
- IEC/UL/EN62368 approval

SLHE15-20Bxx series is one of SCHMID-M's compact size power converter. It features universal AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability. It offers good EMC performance compliant to IEC62368 and CISPR32/EN55032 and the safety certifications to UL/IEC62368 and EN62368 standards. The converters are widely used in industrial and office applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

## Selection Guide

Certification	Model	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
UL/CE/CB	SLHE15-20B03	9.9W	3.3V/3000mA	73	40000
	SLHE15-20B05	14W	5V/2800mA	76	20000
	SLHE15-20B09	15W	9V/1600mA	78	5800
	SLHE15-20B12		12V/1250mA	80	5200
	SLHE15-20B15		15V/1000mA	80	4500
	SLHE15-20B24		24V/625mA	83	1000

Note: \*Part No. with suffix of "A2" means chassis mounting and suffix of "A4" means DIN-Rail mounting.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	100	--	370	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.37	A
	230VAC	--	--	0.22	
Inrush Current	115VAC	--	16	--	A
	230VAC	--	30	--	
Recommended External Input Fuse		2A/250V, slow-blow, required			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	3.3V output	--	±3	--	%
	Other output	--	±2	--	
Line Regulation	Full load	--	±0.5	--	%
Load Regulation	0%-100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	50	100	mV
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccups, continuous, self-recovery			
Over-current Protection		≥150%Io, self-recovery			

# AC/DC Converter

## SLHE15-20Bxx Series

Over-voltage Protection	3.3V/5VDC output	≤7.5VDC (Output voltage clamp or hiccup)			
	9 VDC output	≤15VDC (Output voltage clamp or hiccup)			
	12V/15VDC output	≤20VDC (Output voltage clamp or hiccup)			
	24VDC output	≤30VDC (Output voltage clamp or hiccup)			
Minimum Load		0	--	--	%
Hold-up Time	115VAC input	--	10	--	ms
	230VAC input	--	60	--	

Note: \* The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Test	Input-output Electric Strength Test for 1min., leakage current < 5mA	4000	--	--	VAC
Operating Temperature		-40	--	+85	°C
Storage Temperature		-40	--	+105	
Storage Humidity		--	--	95	%RH
Soldering Temperature	Wave-soldering	260 ± 5°C; time: 5 - 10s			
	Manual-welding	360 ± 10°C; time: 3 - 5s			
Power Derating	-40°C to -10°C	2.00	--	--	% / °C
	+55°C to +70°C	3.33	--	--	
	+70°C to +85°C	2.67	--	--	
	85 - 100VAC	1.67	--	--	% / VAC
	240 - 264VAC	0.83	--	--	
Safety Standard		IEC62368/EN62368/UL62368			
Safety Certification		IEC62368/EN62368/UL62368			
Safety Class		CLASS II			
MTBF		MIL-HDBK-217F@25°C > 300,000 h			

### Mechanical Specifications

Case Material		Black plastic, flame-retardant and heat-resistant (UL94V-0)
Package Dimensions	Horizontal package	62.00 x 45.00 x 22.50 mm
	A2 chassis mounting	96.10 x 54.00 x 31.00 mm
	A4 Din-Rail mounting	96.10 x 54.00 x 35.60 mm
Weight	Horizontal package	90g (Typ.)
	A2 chassis mounting	140g(Typ.)
	A4 Din-Rail mounting	180g(Typ.)
Cooling method		Free air convection



### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B
	RE	CISPR32/EN55032	CLASS B
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV perf. Criteria B
		IEC/EN61000-4-4	±4KV (See Fig. 2 for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±1KV perf. Criteria B
		IEC/EN61000-4-5	line to line ±2KV /line to ground ±4KV (See Fig. 2 for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s perf. Criteria A
Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	0%,70% perf. Criteria B	

# AC/DC Converter



## SLHE15-20Bxx Series

### Product Characteristic Curve

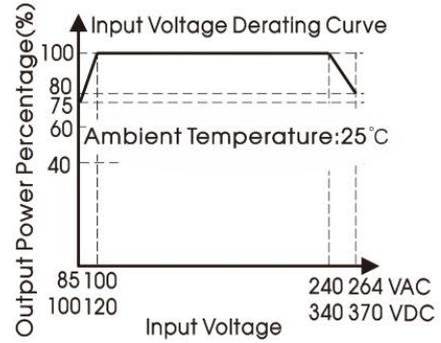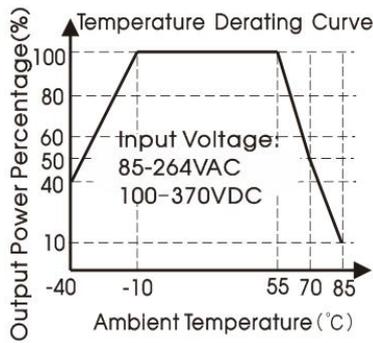

Note: ① With an AC input between 85-100V/240-264VAC and a DC input between 100-120V/340-370VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

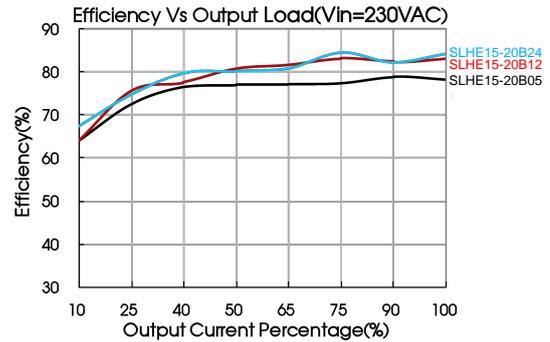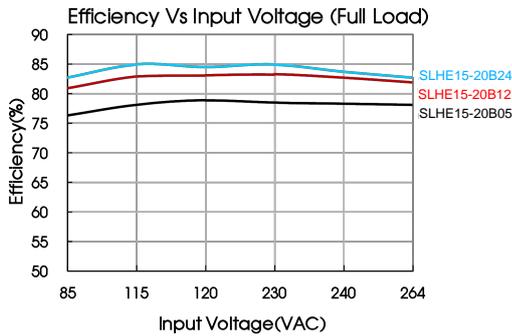

### Design Reference

#### 1. Typical application

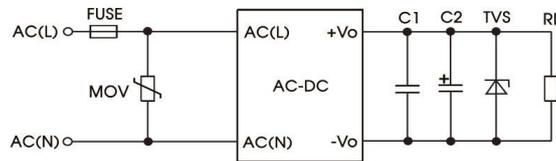


Fig. 1

Model	C2(μF)	FUSE	MOV	TVS
SLHE15-20B03	680	2A/250V slow-blow required	S14K300	SMBJ7.0A
SLHE15-20B05	680			SMBJ7.0A
SLHE15-20B09	470			SMBJ12A
SLHE15-20B12	220			SMBJ20A
SLHE15-20B15	220			SMBJ20A
SLHE15-20B24	68			SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

#### 2. EMC compliance recommended circuit

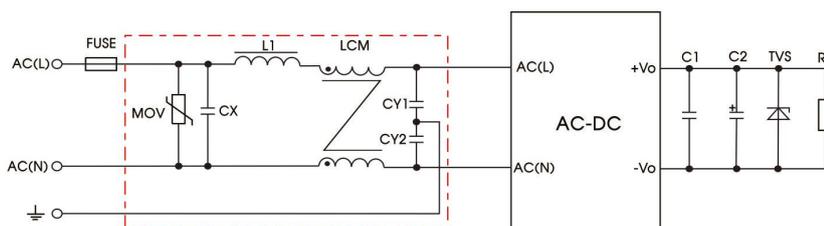



Fig 2

# AC/DC Converter


## SLHE15-20Bxx Series

Component	Recommended value
MOV	S14K300
CY1 , CY2	1000pF/400VAC
CX	0.1 $\mu$ F/275VAC
LCM	10mH, we recommend using part no. SFL2D-Z5-103
L1	4.7 $\mu$ H/2A
FC-LX1D	2KV/4KV EMC filter
FUSE	2A/250V, slow-blow, required

## Dimensions and Recommended Layout

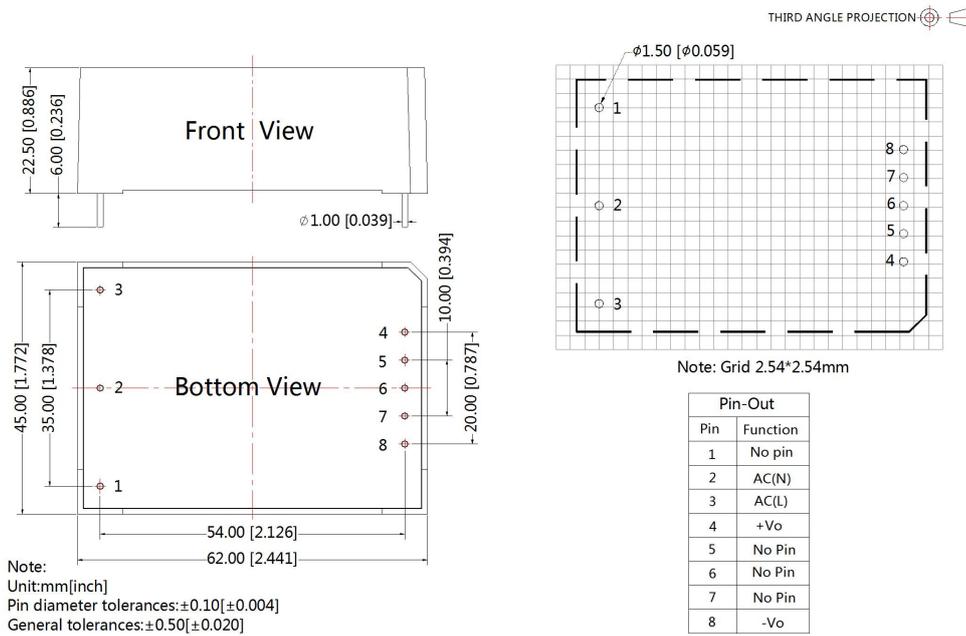

## A2 Dimensions

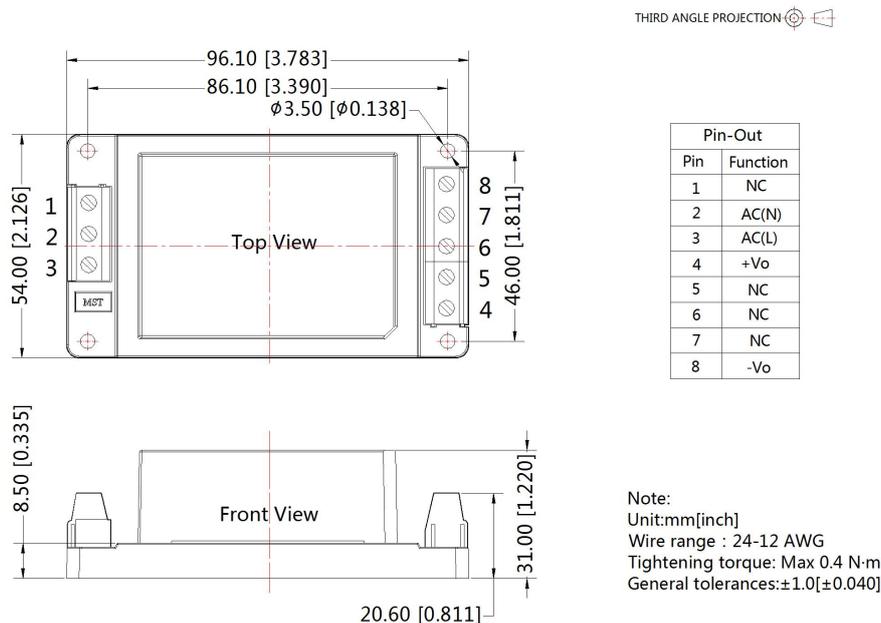


# AC/DC Converter


## SLHE15-20Bxx Series

### A4 Dimensions

THIRD ANGLE PROJECTION 

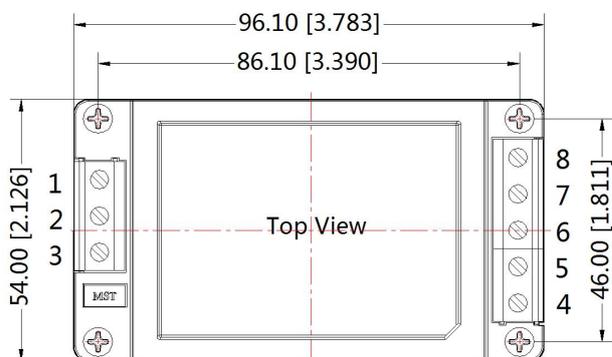

Pin-Out	
Pin	Function
1	NC
2	AC(N)
3	AC(L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

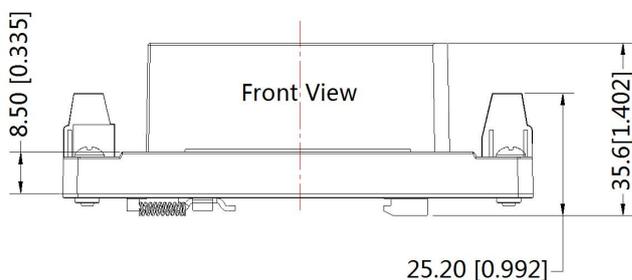

Note:  
Unit: mm[inch]  
Wire range: 24-12 AWG  
Tightening torque: Max 0.4 N·m  
Mounting rail: TS35, rail needs to connect safety ground  
General tolerances:  $\pm 1.0[\pm 0.040]$

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75% with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. We can provide product customization service, please contact our technicians directly for specific information;
4. Products are related to laws and regulations: see "Features" and "EMC";
5. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.