




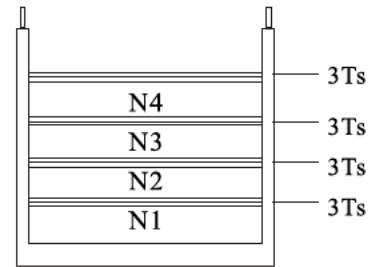

1. PHYSICAL CHARACTERISTICS(mm)

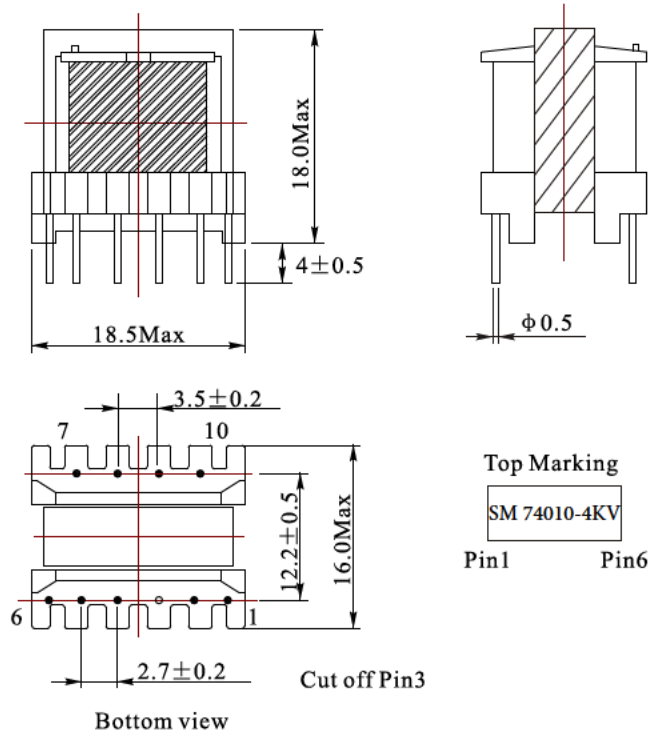

2. ELECTRONICAL SCHEMATIC

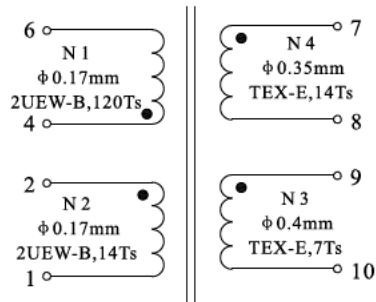

3. ELECTRONICAL SPECIFICATIONS

Inductance(4-6): 1.66mH±10%@1.0KHz,0.25V

DCR(4-6): 3.2Ω Max

Insulation resistance: 4000Vac,5mA,2S@ Pri to Sec

Test Instrument: WK3260B+3261A

MATERIAL LIST:

No	Item	Descriptions	Vendors	Temp.	UL NO.
1	Core	EE16 P4	ACME	N/A	N/A
2	Bobbin	EE16 4+6PIN T375J	CHANGCHUN	130°C	E59481
3	Wire	2UEW-F	SHANTOU	155°C	E239508
4	Wire	TEX-E	SHENZHEN	130°C	E350162
5	Tape	#201	SUZHOU	130°C	E188295
	Varnish	JC-B46A	JICHENG	105°C	E348732

NAME:	Flyback Transformer		
CUSTOMER P/N:	74010	DATE:	2023-02-21
SCHMID-M P/N:	SM 74010-4KV	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	

