



SPECIFICATION:

Current Rating: 2,0A
 Insulation Resistance: 10000MOhm min. at DC 100V
 Contact Resistance: 20mOhm max.
 Withstand Voltage: 1000VAC for 1 Minute
 Operating Temperature: -55°C to +105°C
 Contact Material: Phosphor Bronze
 Contact Plating: Au 3u"over Ni
 Insulator Material: PBT+30%GF UL94V-0
 Mating Cycles: Category II, 500 Cycles
 Insertion Force: 160Pin max. 150N
 Withdrawal Force: 0,15N min. per Individual Contact

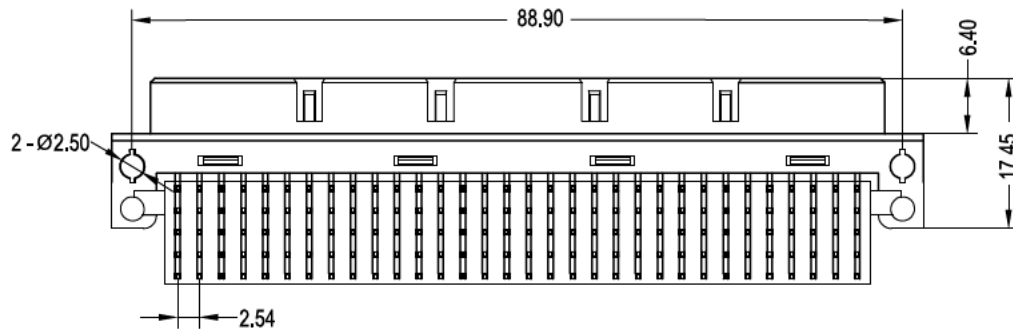

TOLERANCE	
X ±0.35	X XX: ±0.20
X X: ±0.25	X XXI: ±0.15

SCALE	UNIT
	mm

DRAW	Valter	DATE	15.6.2020
------	--------	------	-----------

CHECK	Thomas	REV	
-------	--------	-----	--



TITLE	SM C DIN DFR 160-G
-------	---------------------------

DESCRIPTION	DIN 41612 Typ E, Female 160PIN Solder 90°
-------------	---