


Recommended P.C.B Layout

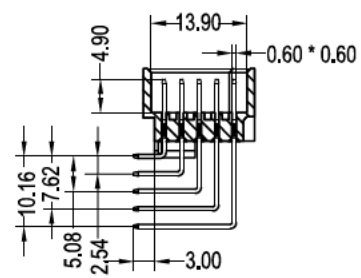

**SPECIFICATION:**

- Current Rating: 2,0A
- Insulation Resistance: 10000MOhm min. at DC 100V
- Contact Resistance: 20mOhm max.
- Withstand Voltage: 1000VAC for 1 Minute
- Operating Temperature: -55°C to +105°C
- Contact Material: Phosphor Bronze
- Contact Plating: Au 3u"over Ni
- Insulator Material: PBT+30%GF UL94V-0
- Mating Cycles: Category II, 500 Cycles
- Insertion Force: 160Pin max. 150N
- Withdrawal Force: 0,15N min. per Individual Contact

TOLERANCE	
X ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15
SCALE	UNIT
	mm
DRAW Valter	DATE 15.6.2020
CHECK Thomas	REV



TITLE  
**SM C DIN DMR 160-G**



DESCRIPTION  
DIN 41612 Typ E, Male 160PIN Solder 90°