


Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be ROHS materials

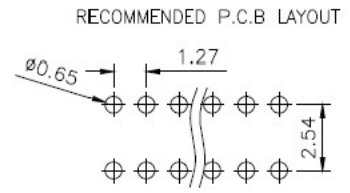

A=3,0mm E=6,0mm C=21,0mm D=12,0mm

TOLERANCE		SCHMID-M
SCALE	UNIT mm	
DRAW Walter	DATE 20.4.2021	TITLE
CHECK Vanda	REV	SM C02 1270 XX FS
		DESCRIPTION
		Header RM1,27x2,54mm, THT, Dual Rows and Insulator