


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2018.12.17	尹晖



F
E
D
C
B
A

F
E
D
C
B
A

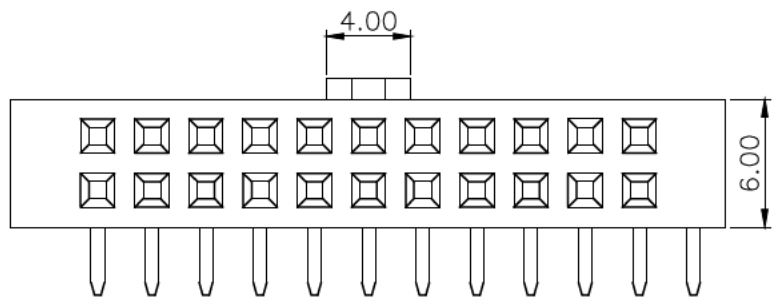


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0 PA6T

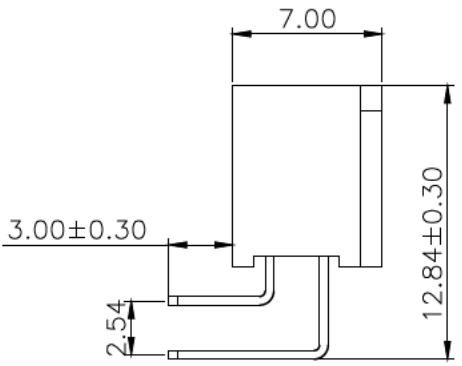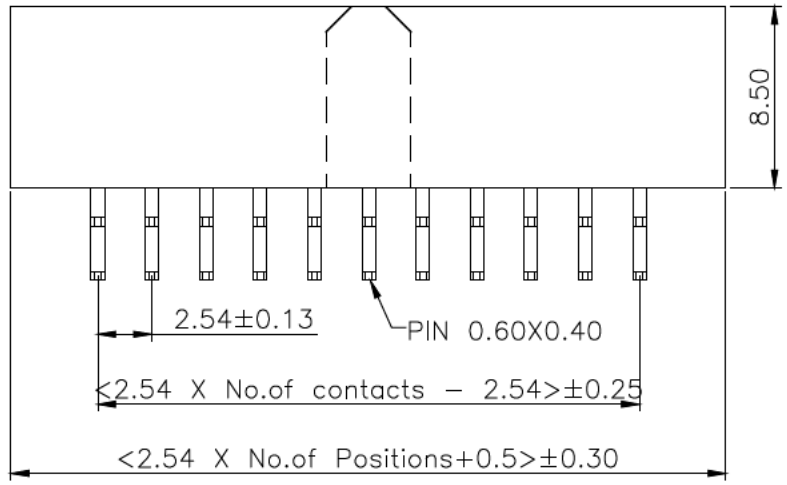

Recommended P.C.Board Hole Layout

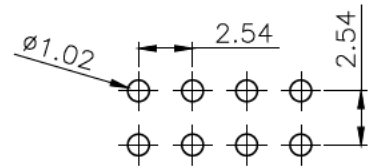

SCHMID-M

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE: 2018.12.17
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

SM C02 2817 XX R

TITLE:
 2.54 FEMALE HEADER
 DUAL ROWS R/A TYPE
 BASE 8.50H

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1