
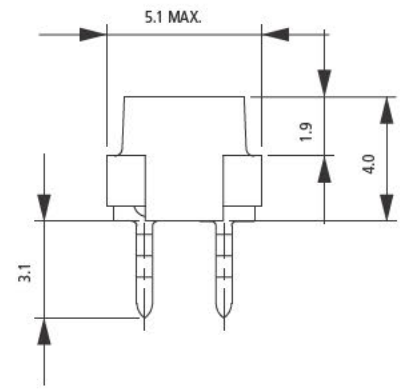
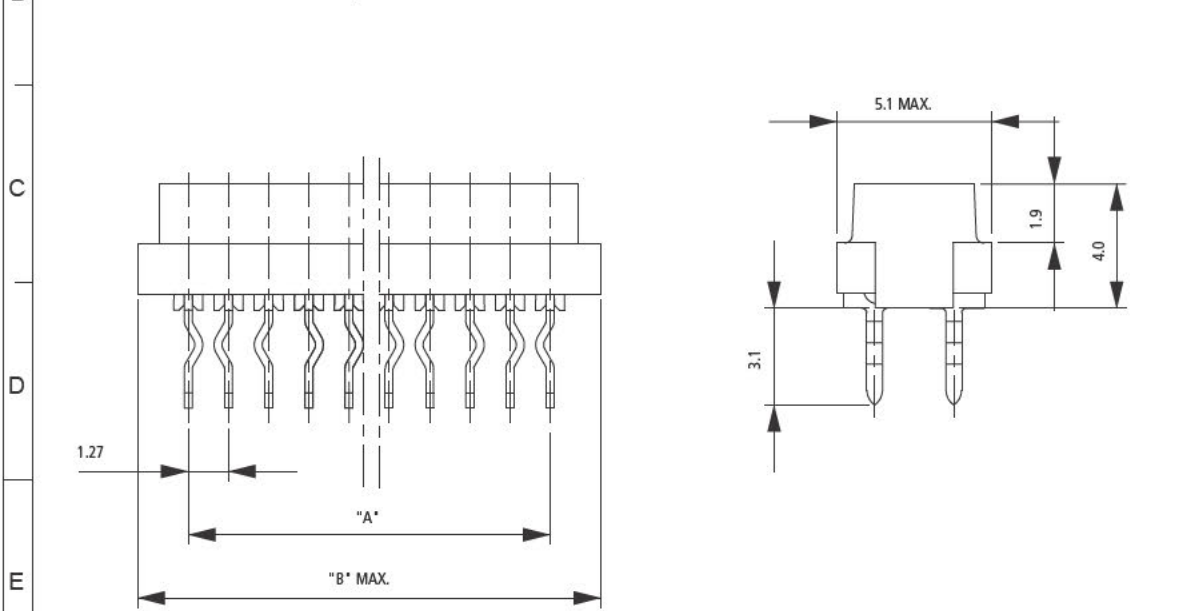


5	6	7	8
Rev.	DESCRIPTION	DRAWN	CHECKED
A	NEW RELEASE		~

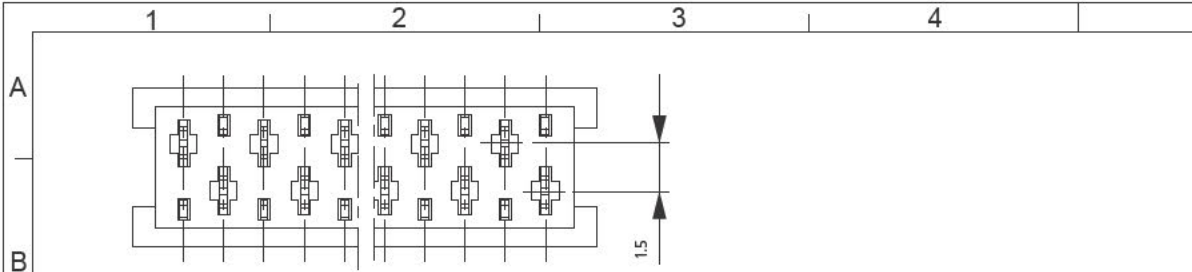

Specifications:

Material:

Insulator: PBT glass reinforced rated UL94V0

Contact: Phosphor Bronze

Electrical:

Current Rating: 1A



Contact Resistance: 30mOhms max.

Insulation Resistance 3000 MOhms min.

Dielectric Withstanding Voltage: 500V AC for 1 minute

Operation Tem.: -40°C +105°C

No. Positions	Dimensions mm	
	A	B
4	3,81	7,1
6	6,35	9,7
8	8,89	12,2
10	11,43	14,7
12	13,97	17,3
14	16,51	19,8
16	19,05	22,4
18	21,59	24,9
20	24,13	27,4
22	26,67	29,94
24	29,21	32,48
26	31,75	35,02

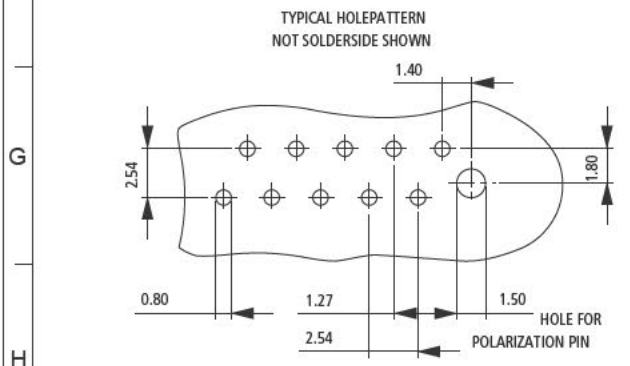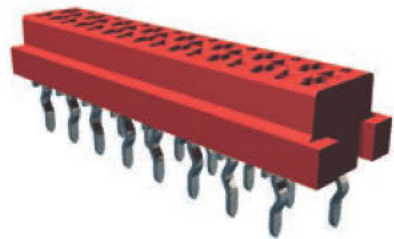

GENERAL TOLERANCE	ANGEL TOLERANCE
.X +/-15	.X +/-3
.X +/-10	.X +/-2
.XX +/-5	.XX +/-1

PROJECTION		TITLE	Micro-Match THT Female Top Entry
UNITS	MM	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	SM C03 3128g XX DG

DRAWING TYPE	CUSTOMER		
SCALE	1 : 1	SHEET	1 OF 1
DRAWING NO.			



XX: Number of Poles
D: D- W/O polarization (Standard)
C- W/ polarization (customized only)