


PCB Layout



NUMBER OF POSITIONS	DIMENSION			Q'ty /Tube
	A	B	C	
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

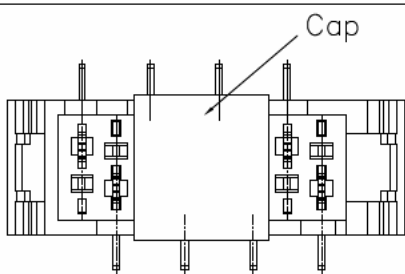

NOTES:  
 Current Rating: 1.0AMP  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact Plating: Sn over Ni  
 Insulator Material: High Temperature plastic (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:  
 DECIMALS Angle  
 XX: ±0.40 ± 3°  
 XXX: ±0.25  
 XXXX: ±0.15

PART NO SM C02 3131g XX CF

TITLE: MicroMatch Socket SMT W/Lock W/pol XX:Nr. position

SCALE 1:1  
 UNIT MM  
 PROJ.   
 SHEET

A0	2015/06/25	NEW	HuaZT		HuaZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE