

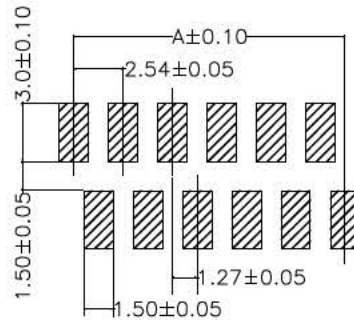

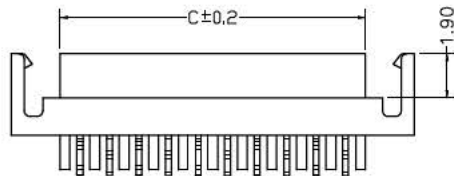
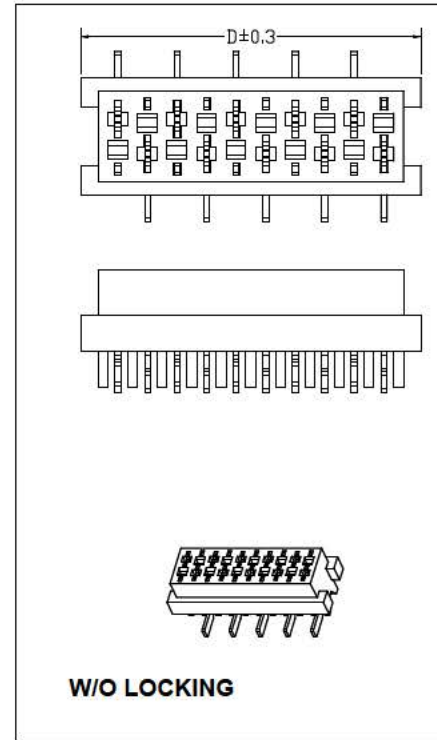


ROHS COMPLIANT

1.27mm Micro Match Socket 180° SMT

DIM.A= 1.27 × No. of Spaces
 DIM.B= DIM.A + 5.9
 DIM.C= DIM.A + 1.69
 DIM.D= DIM.A + 3.18
 *Available in 4 ~ 26 Circuits

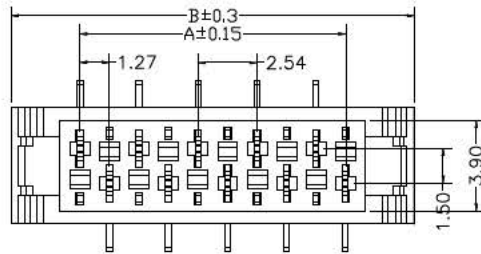

W/LOCKING

SPECIFICATION

Current Rating: 1.0Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: High Temperature plastic
UL 94V-0

XX: NR PIN
 Y: C: W/Polarization
 D: W/O Polarization
 W: F: W/LOCKING
 G: W/O LOCKING

Packing: Tube + Pick&Place

Unless Otherwise specified tolerance

X:±0.35
 X.X:±0.25
 X.XX:±0.20
 X.XXX:±0.15


SCALE: 1:1

UNIT:
mm



DRAWN: Peter
 CHECKED

TITLE:
 1.27mm Micro Match Socket 180° SMT



DRAWING NO: SM C02 3131_g XX YW

PRODUCT NO:

Recommended P.C.B.Layout

Add option of plating

10/8/1

DATE

REV

DESCRIPTION

1

2

3

4

5

6

7

8