





SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

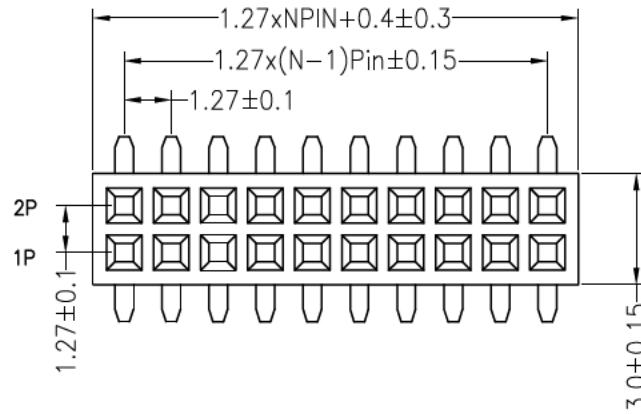



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

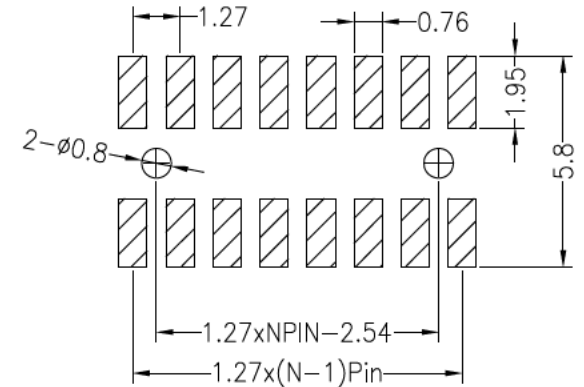

Ordering Information

SM C02 4828 XX BD H4,60 tube post

- SM C02 4828 : Series
- XX : Number of Pin (total)
- BD : Double Row, SMD
- H4,60 : Height
- tube : Packing - if omitted = Bag
 - Tube
- post : Position Peg: - if omitted = Without Post

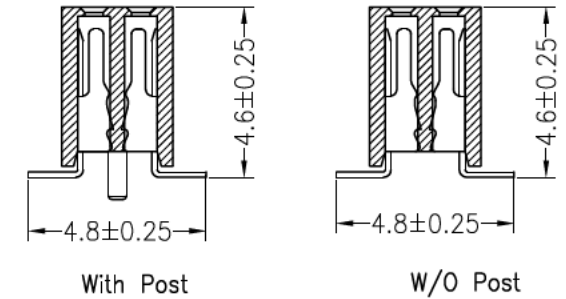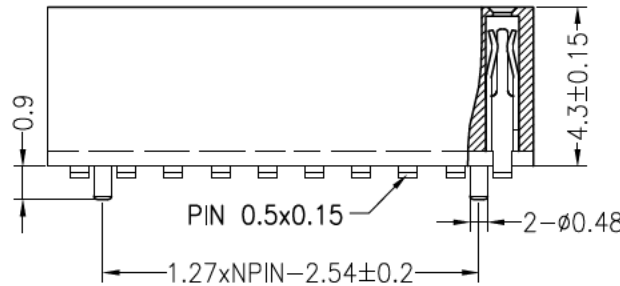

OPERATION		DRAW	YYuSheng	12.04.18	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL					

SCHMID-M		PART NO.	SM C02 4828 XX BD H4,60 tube
		TITLE:	1.27PF 2xNPIN H4.3 SMT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	