


Specifications


Current Rating: 1Amp
 Insulation Resistance: 1000M Min. Ω
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20m Max Ω
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

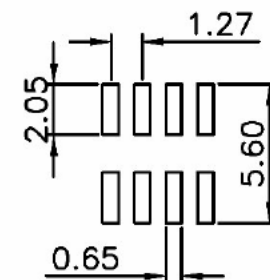

Recommended P.C.B Layout
 (Tolerance: ±0.05)

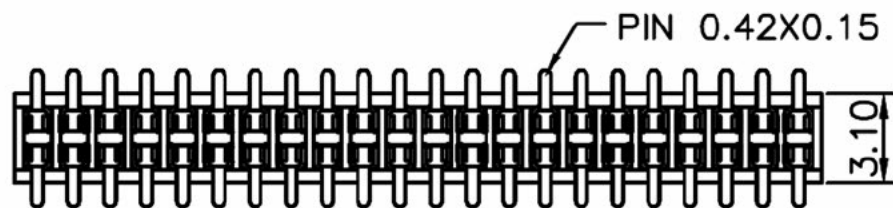

TOLERANCE			
SCALE	UNIT mm		
DRAW Walter	DATE 21.2.2019	TITLE SM C02 4835 XX BD H=4.30 With Cap Reel	
CHECK Vanda	REV	DESCRIPTION Female Header Dual Rows SMT Plastic Height 4,3mm , XX: Nr. Poles	
