
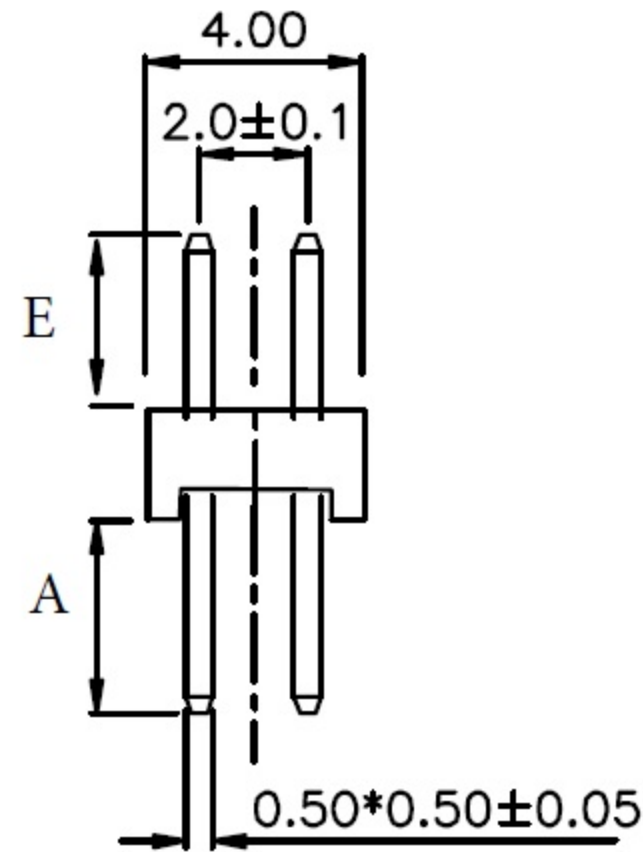


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

A&E: CUSTOMER LENGTH AVAILABLE
N: HALF OF CONTACTS

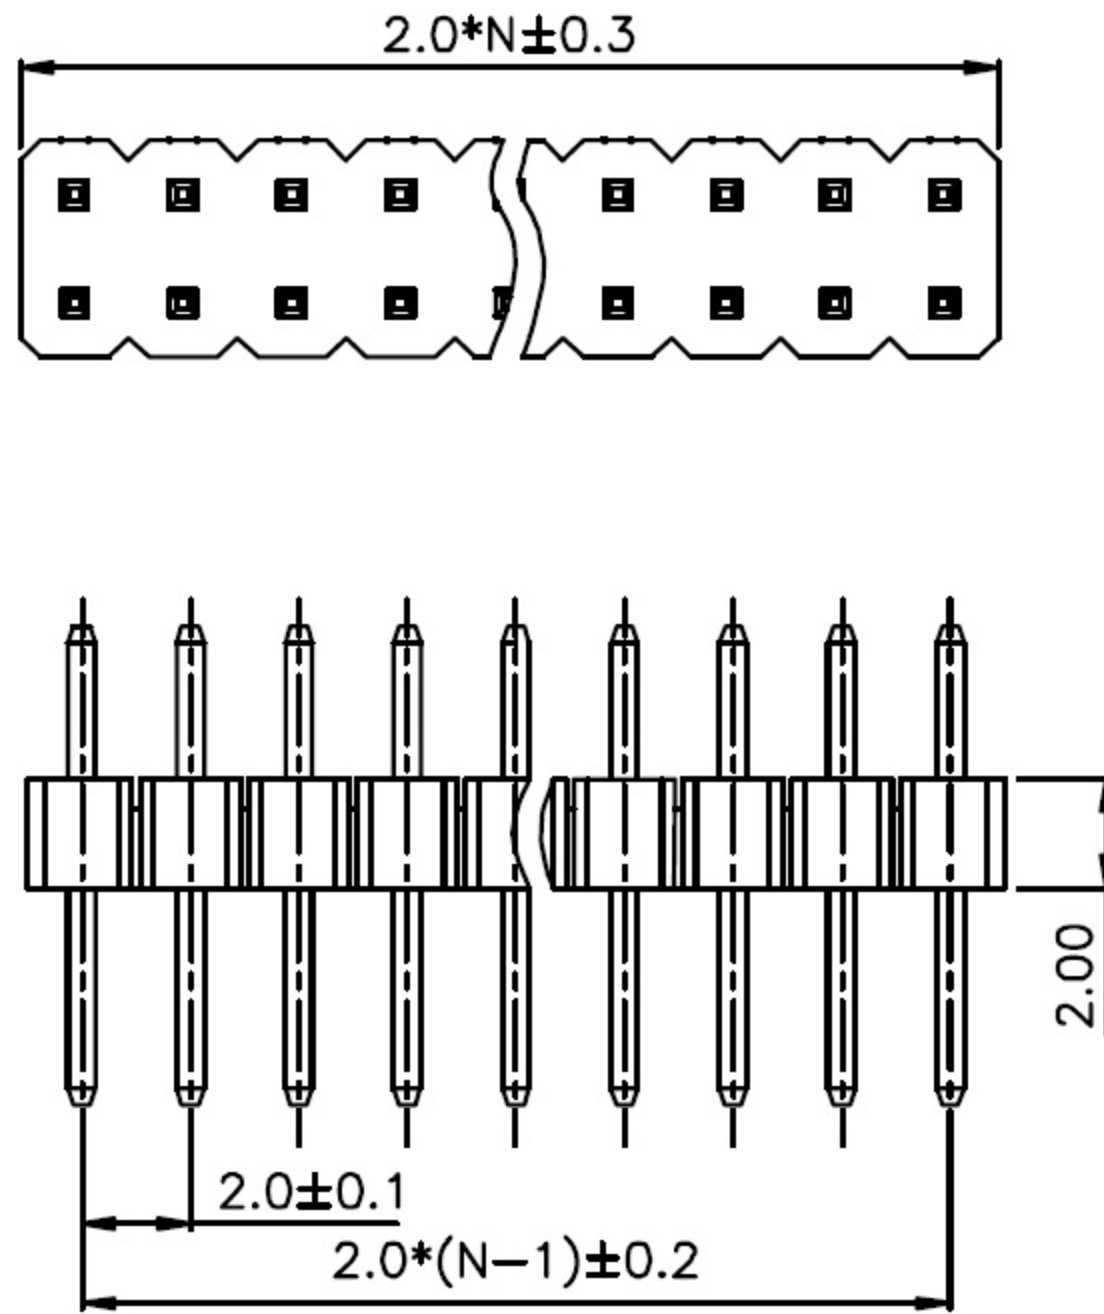


NOTES:

- MATERIAL & FINISHES
 - INSULATOR: THERMOPLASTIC (UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.5 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 600VAC.
 - CONTACT RESISTANCE: 20mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO +105°C.

E=4.00 A=1.5

XX = No. of pins

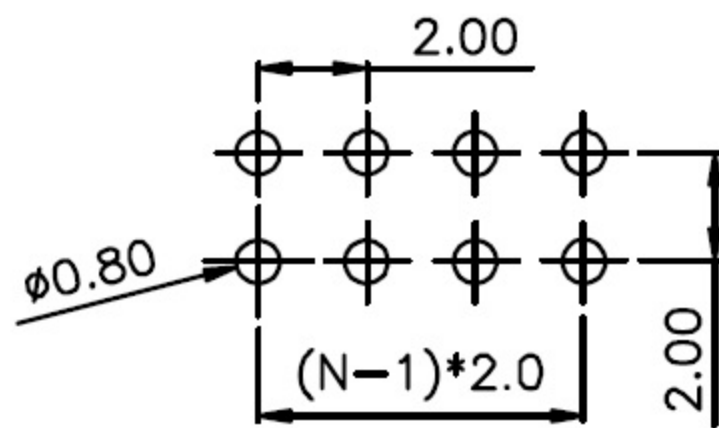

RECOMMEND PCB LAYOUT
(TOLERANCE = ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.0MM PIN HEADER DUAL ROW
X.	±0.60	X.	±5°	UNITS	mm	S/T Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.				SM C02 6100 XX BS (A-1,5mm E-4,0mm)			