REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

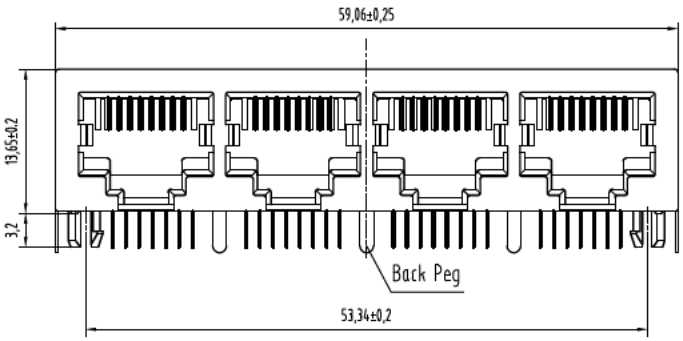



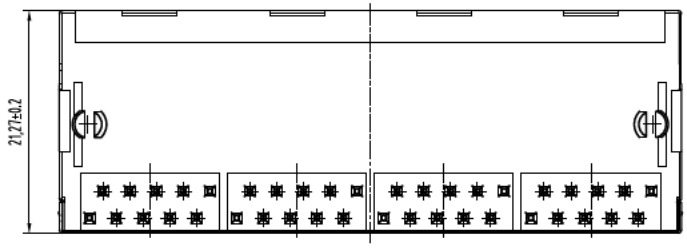

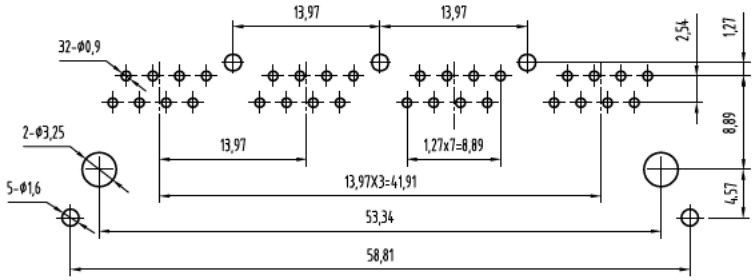

PC Board Layout
Component Side Shown

NOTES:

MATERIAL :

1.HOUSING MATERIAL	:GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL	:PHOSPHOR BRONZE Φ0.46mm.
3.PLATING	:GOLD PLATING OVER NICKEL.
4.SHIELD	0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

1.VOLTAGE RATING	:125 VAC RMS.
2.CURRENT RATING	:1.5 AMP.
3.CONTACT RESISTANCE	:30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	:500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE	:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY	:750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER	:1 LB MIN.

ENVIRONMENTAL:

1. STORAGE	: -40℃~+85℃
2. OPERATION	: 0°C TO 70°C.

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM
.X ± 0.15
.XX ± 0.075
.XXX ± 0.05

ANGLES ± 0.5

THIRD ANGLE PROJECTION

DFTD: SHB	DATE: 2016-12-13	
CHKD:	DATE:	
MFG:	DATE:	
APPVL:	DATE:	
MATERIAL :		
QT'Y :		
FINISH :		
SCALE :		

SCHMID-M

TITLE SIDE ENTRY PCB 4xJACK 8P8PC
SHIELDED/RJ TAB DOWN

DRAWING NO. SM C04 0060 88 DA	SIZE A3	REV 0
/PART NO.		
DO NOT SCALE DRAWING	SHEET X OF Y	

H G F E D C B A

8 7 6 5 4 3 2 1