

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F




F

G

G

H

H

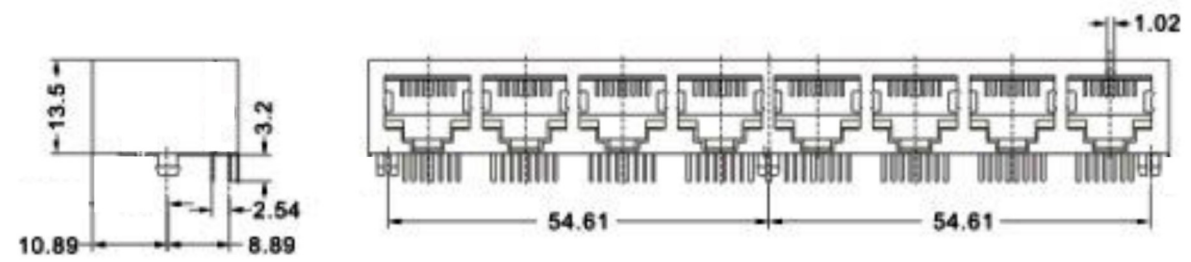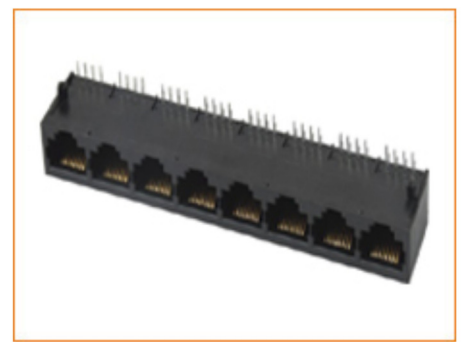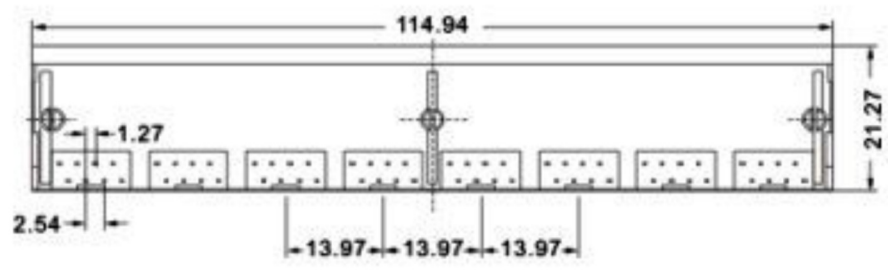

Contact Resistance	2 mΩ max.
Insulator Resistance	500 mΩ ,min. at DC 500V
Current Rating	24V DC 3 AMP Max
Withstanding voltage	AC500V/1Min
Contact	Phosphor Bronze , Gold Plated Or Tin Plated
Housing	PBT & 30% Glass Fiber(UL94V-0)
Position Details	8P8C

**RoHS
Compliant**

SCHMID-M

APPD.		TOLERANCE	
DWG. HELEN		0 ± 0.38	.00 ± 0.25
DATE	UNIT	SIZE.	REV.
2011/5/31	M M	A 4	A
	PAGE	1 OF 1	

PART NAME	
SIDE ENTRY PCB JACK ROUND PIN 8P8C 8 JACKS B TYPE W/O SHIELD BLACK ROHS	
PART NO. SM C04 0060 88 HN	

1 2 3 4 5 6 7 8