




RoHS

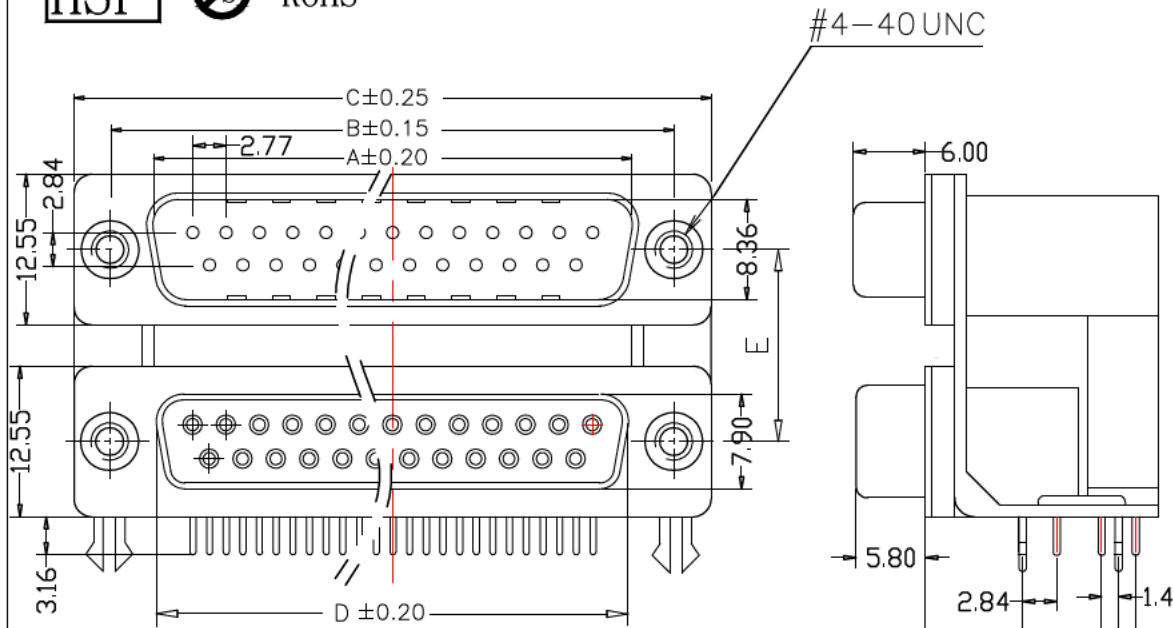

Material:

Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0 Black

Contact: Brass Gold flash

Shell: Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A

Contact Resistance: 30 milliohms Max

Withstanding Voltage: 1000V AC For 1 Minute

Insulation Resistance: 5000 Megohms Min

Operating Temperature: -55° C to +105° C

Ordering Code:

SM C05 0592 2xXX MF E=


MF = Male Over Female

XX: Number of Poles per Connector

	09	15	25	37
A	16.92	25.25	38.96	55.42
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30
D	16.33	24.66	38.38	54.84

E= Distance Between Connectors

Options: 15,88 / 19,05 / 22,86 mm

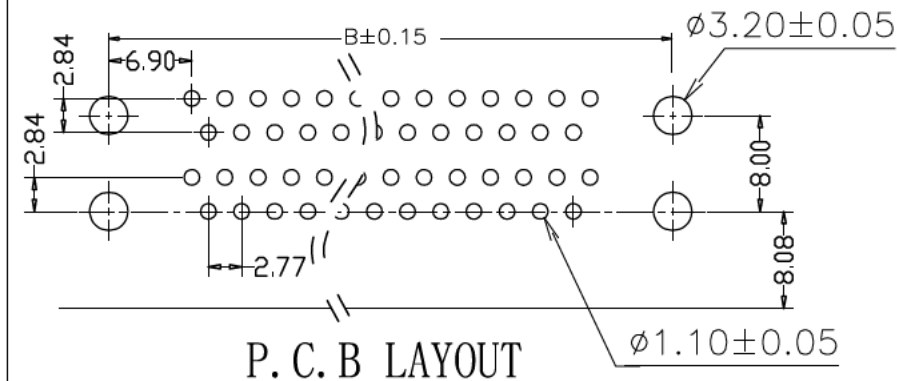

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW DATE 20/03/2019

CHECK DATE 20/03/2019



TITLE:
SM C05 0592 2xXX MF E=

DRAWING NO:

PRODUCT NO:

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		