

Notes:

1. Electrical Characteristics:

- 1. 1 Contact Resistance: 20mΩ Max
- 1. 2 Dielectric Withstanding Voltage: 600V AC(rms) for 1 Minute
- 1. 3 Insulation Resistance: 1000mΩ Min
- 1. 4 Current Rating: 1A
- 1. 5 Voltage Rating: 250V AC rms



2. Environment Characteristics:

- 2. 1 Temperature: -40°C ~ +105°C

3. Materials:

- 3. 1 Contact Materials: Phosphor Bronze
- 3. 2 Contact Plating: Gold plate
- 3. 3 Insulator Materials: PA6T

N = No. of contact each Row

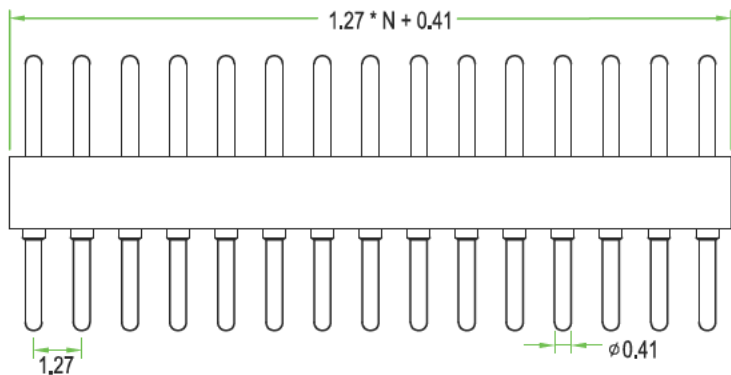

SCHMID-M

GENERAL TOLERANCE

X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:

CHECK:

AUDIT:

APPROVE:

DATE: 2020.02.28

DATE: 2020.03.02

DATE: 2020.03.02

DATE: 2020.03.02

PART NO.:

SM C07 0210 XX D

XX: Number of Pin total

TITLE:

1.27mm Round Pin Hear, Double Row, DIP

REV.: 01	UNIT.: mm	SCALE.: 1:1	PAGE.: 1/1	
--------------------	---------------------	-----------------------	----------------------	--