


Standard	UL	VDE
Rated voltage	300V	250V
Rated current	8A	7A
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Pitch	3.50mm(.150")	
Poles	2P, 3P --- Any poles	
Housing	PA66, UL94V-0	
Solder Pins	Brass, Tin plated	

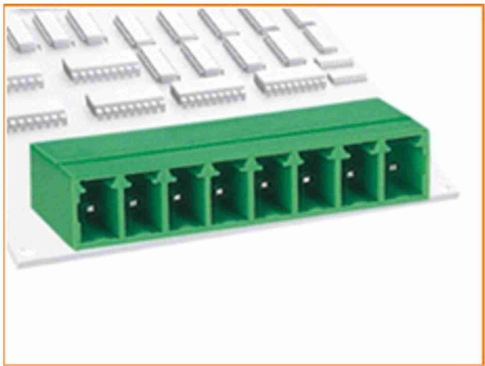

RoHS Compliant		SCHMID-M	
APPD.		TOLERANCE	PART NAME
DWG.		$XX \pm 0.25$ $XY \pm 0.36$ ANG. \pm	Pluggable Terminal Block PCB Angled Right Pitch 3,50mm Green XX: No. Poles
DATE	HELGA	UNIT	PART NO.
2013/10		M M	SM C09 0352 XX ROC
		PAGE 1 OF 1	