

1 2 3 4 5 6 7 8






(Version)	Rev. Content	Change Person

A

B


C

D

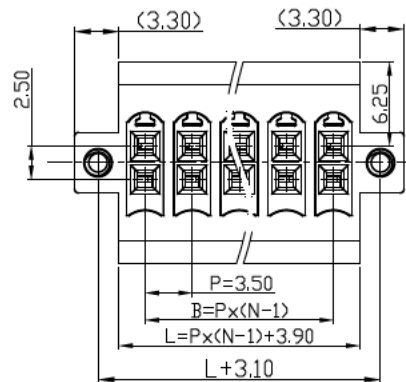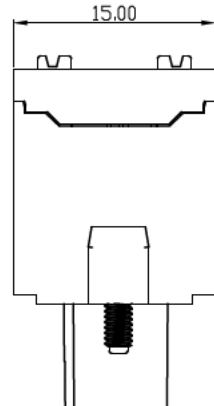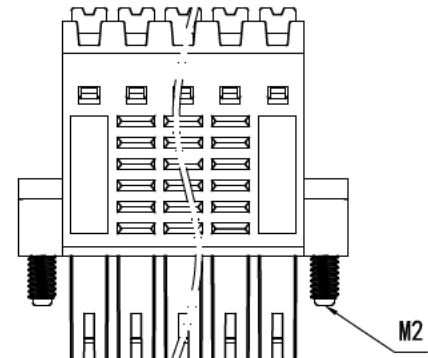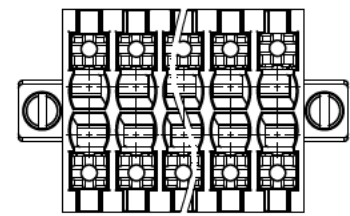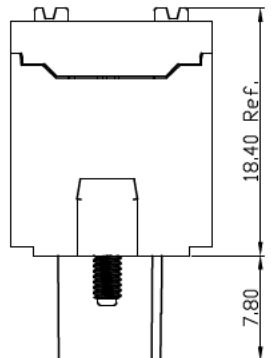

Technical Data				
UL	Use group	B	C	D
	Rated Electrical Parameters	150V/10A	/	150V/10A
IEC	Overvoltage Category	III/3	III/2	II/2
	Pollution Degree	/	/	250V/10A
Rated Electrical Parameters		/	/	250V/10A
Wire Range		/		
Frequency Voltage		AC 1390V		
Rated Surge Voltage		2500V		
Insulation Resistance		DC500V 500MΩ above		
Contact Resistance		≤20mΩ		
String Length		/		
Temperature		-40°C~+105°C		
Rated torque		/		
Material and plating				
Housing		PA66+GF (UL94 V-0)		
Contact		Copper alloy, Sn plated		
/		/		

(Product Number Code):
SM C09 03523 XX CSC

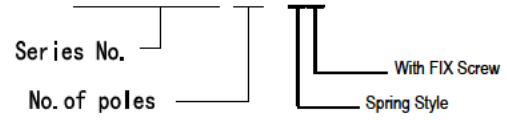

P=3.5mm, N for hole digits Significant Digits : 2*02P~24P

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	7.40	10.90	14.40	17.90	21.40	24.90	28.40	31.90	35.40	38.90	42.40	45.90
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	49.40	52.90	56.40	59.90	63.40	66.90	70.40	73.90	77.40	80.90	84.40	
B	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	

SCHMID-M

Part Number : SM C09 03523 XX CSC

Approval : _____ Drawing NO. : _____

Audit : _____ Units : mm Page : 1/1

Design : _____ Scale : FULL

Tolerance Range	
150~	±1.50
60~150	±1.00
30~60	±0.80
6~30	±0.40
0~6	±0.25
Angle	X ±2°
	XX ±1°

Version : TO

E

E

1 2 3 4 5 6 7 8