


Standard	UL	VDE
Rated Voltage	300V	320V
Rated Current	15A	20A
Wire Range	24-12AWG	0,2-3,3mm <sup>2</sup>
Withstanding Voltage	AC2500V/1Min	
Ambient Temperature	(-)40°C to +105°C	
Strip Length	7mm	
Pitch	5.08 (.197")	
Poles	2P, 3P --Any poles	
Housing	PA66, UL94V-0	
Wire Cage	Brass, Ni plated	
Contact	Brass, Ni plated	

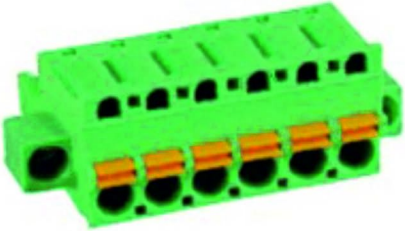

RoHS  
Compliant

**SCHMID-M**

linear dimension (Tolerances Standard GB/T 14486-2008)										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

APPD.	
DWG.	Brawn
DATE	2019/05

SCAL F	
UNIT	MM
PAGE	1 OF 1

TOLERANCE	XX ± 0.25 XX ± 0.35 ANG. ±
SIZE	A 4
REV.	C
PART NAME	Pluggable Terminal Block Spring Style With Fix Screws Green XX: No. Poles
PART NO.	SM C09 0581k XX CSC