


Standard	UL	VDE
Rated voltage	300v	250V
Rated current	20A	20A
Wire range	26-12AWG	2.5mm <sup>2</sup>
Withstanding voltage	AC2000V/1Min	
Ambient temperature	(-)40°C to +105°C	
Strip length	7mm	
Torque	0.5Nm(3.5Lb-In.)	
Pitch	5.00mm (.197")	
Poles	2P, 3P ---Any poles	
Housing	PA66, UL94V-0	
Screws	M3, steel, Cr3+ Zn plated	
Solder Pins	Brass, Tin plated	
Contact Cage	Brass, Ni plated	

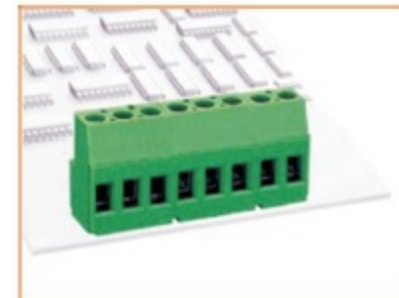

RoHS Compliant		<b>SCHMID-M</b>	
APPD.		TOLERANCE	PART NAME
DWG. HELGA	UNIT M M	XX ± 0.25 XY ± 0.35 ANG. ±	Terminal Block Screw Clamp PCB Straight Horizontal Conductor
DATE 2013/10	PAGE 1 OF 1	SIZE A 4 REV. C	PART NO. SM C09 15017 XX SS4