

1 2 3 4 5 6 7 8

A A


B B

C C


D D

E E

F F

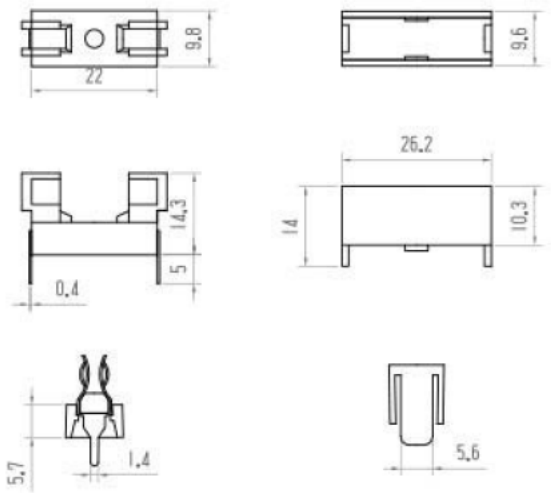

PCB LAYOUT



Rated Load	5A 250V AC
Operating Temperature	-10°C ~ +70°C
Withstand Voltage	AC1000V(50HZ)/Min
Base	Flame resisting ABS
Cap	Polystyrene
Terminal	Brass, tin plated

CAP	FUSE
Bayonet type	5X20



TOLERANCES UNLESS NOTED OTHER WISE X XX XXX 90° FORMED +20° ANGLES -1 FIRST ANGLE PROJECTION 	DRAWN		MODEL NO.		CUSTOMER	
	DESIGN		SM FUSE FBFH 1099		CUSTOMER NO.	
	CHECKED		Fuse holder, PCB, Horizontal, THT,		VER	
	APPROVED				1:1	SCALE
	DATE				mm	SHEET
	CONTRACT NO.					
	AGENCY APPROVAL					

1 2 3 4 5 6 7 8