

Model No.


SMFH1095



Rated Load	10A 250V AC
Operating Temperature	-10℃ ~ +120℃
Withstand Voltage	AC1000V(50HZ)/Min

Base	PA+30%GF
Cap	PA+30%GF
Terminal	Brass tin plated

PCB terminal mounted

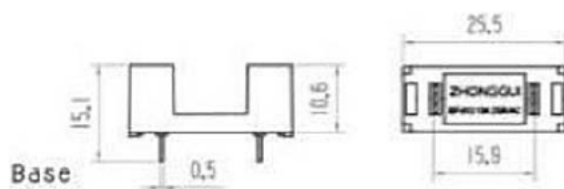

## PCB LAYOUT



CAP	FUSE
Bayonet type	5X20

TOLERANCE .X±0.3, .XX±0.15 ANGLE ±1°

DIMENSION UNIT mm.