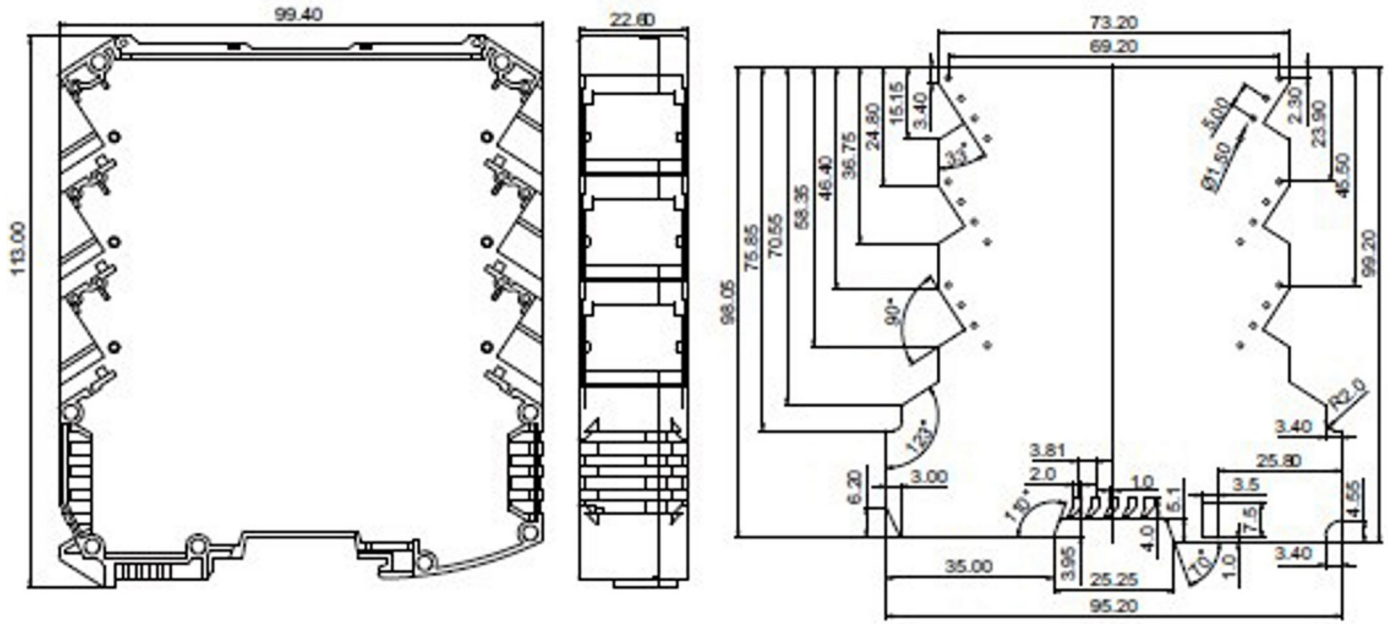

Standard:	UL
Rated voltage:	300V
Rated current:	15A
Wire Range:	28-12AWG/2.5mm2
Size (H/W/T):	113 x 100 x 22.5mm
Ambient temperature:	-40°C to +105°C
Pitch:	5.0mm
Poles:	3P
Housing:	PA66, UL94V-0
Contact:	Brass, Tin Plated

RoHS Compliant

SCHMID-M

APPD.	SCALE	TOLERANCE X.XX ± 0.25 X.X ± 0.35 ANG. ±	PART NAME Schmid-M: Interface Mould Housing
DWG. HELGA	UNIT M M	SIZE. A 4	PART NO. SM H 806-22.5
DATE 2013/10	PAGE 1 OF 1	REV. C	