
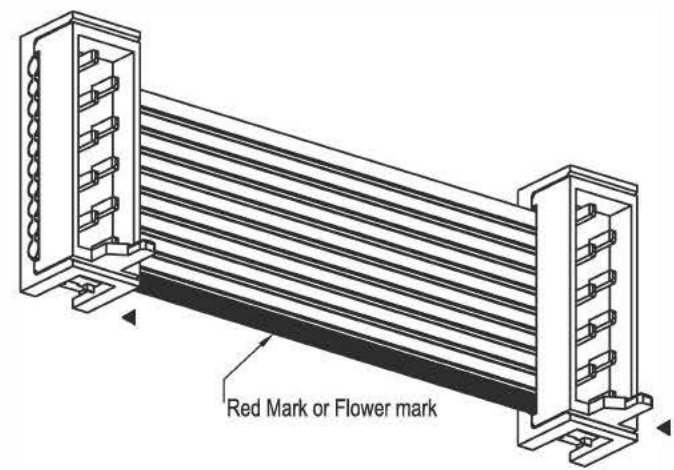


- Notes:**
1. Electrical Characteristics:
    - 1.1 Contact Resistance: 20mΩ Max
    - 1.2 Dielectric Withstanding Voltage: 600V AC(rms) for 1 Minute
    - 1.3 Insulation Resistance: 1000mΩ Min
    - 1.4 Current Rating: 3A
    - 1.5 Voltage Rating: 250V AC rms
  2. Environment Characteristics:
    - 2.1 Temperature: -40°C ~ +105°C
  3. Materials:
    - 3.1 Contact Materials: Copper Alloy
    - 3.2 Contact Plating: Tin or Gold plate
    - 3.3 Insulator Materials: PBT,Red , UL94V-0

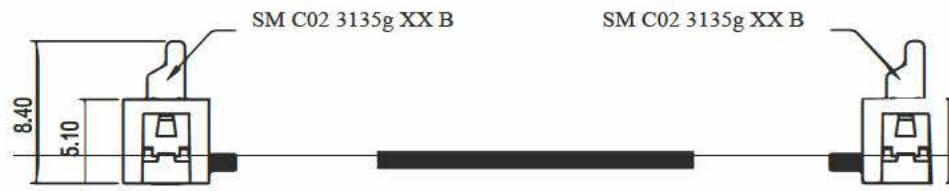

How to Order:

**SM C01 Cable FFC XXpol. L=YYYmm + 2x SM C02 3135g XXB**

XX: Poles of Connector from 04P~26P

YYY - Length of "L" (150=150mm)

**SCHMID-M**

**GENERAL TOLERANCE**

X* ± 5.0°	X. ± 0.30
X° ± 3.0°	X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

**DESIGN:**

**CHECK:**

**AUDIT:**

**APPROVE:**

**DATE:** 2020.02.28

**DATE:** 2020.03.02

**DATE:** 2020.03.02

**DATE:** 2020.03.02

**DWG. NO.:**

**PART NO.:**

**TITLE:**

Flat Cable Assembly, Pitch 2.54  
Connector - Red Micro Match

<b>REV.:</b> 01	<b>UNIT.:</b> mm	<b>SCALE.:</b> 1:1	<b>PAGE.:</b> 1/1	
--------------------	---------------------	-----------------------	----------------------	--