




Item		Specification
NO. of conductors	N	
Pitch	P	$1.0 \pm 0.15$
Total Pitch	PT	
Total Length	L	$\pm 3.0$
Insulation Length	IL	$\pm 3.0$
Margin Width	M	$1.0 \pm 0.20$
Total Width	W	$\pm 0.20$
Strip Length	S1	$4 \pm 1.0$
Strip Length	S2	$4 \pm 1.0$
Reinforeing tape length	B1	$8 \pm 2.0$
Reinforeing tape length	B2	$8 \pm 2.0$
Slanting	A	$\leq 0.3$
Over lap		$\leq 0.5$
Terminal thickness	t	$0.3 \pm 0.08$
Thickness insulation	t1	$0.12 \pm 0.05$
Conductor thickness	Ct	$0.035 \pm 0.005$
Conductor width	Cw	$0.65 \pm 0.08$
Supporting Tapc Color		(Blue)
PET(Supporting Tapc Color)		0.225mm
PET(Insulation)		0.043mm
PET(Insulation)		0.043mm

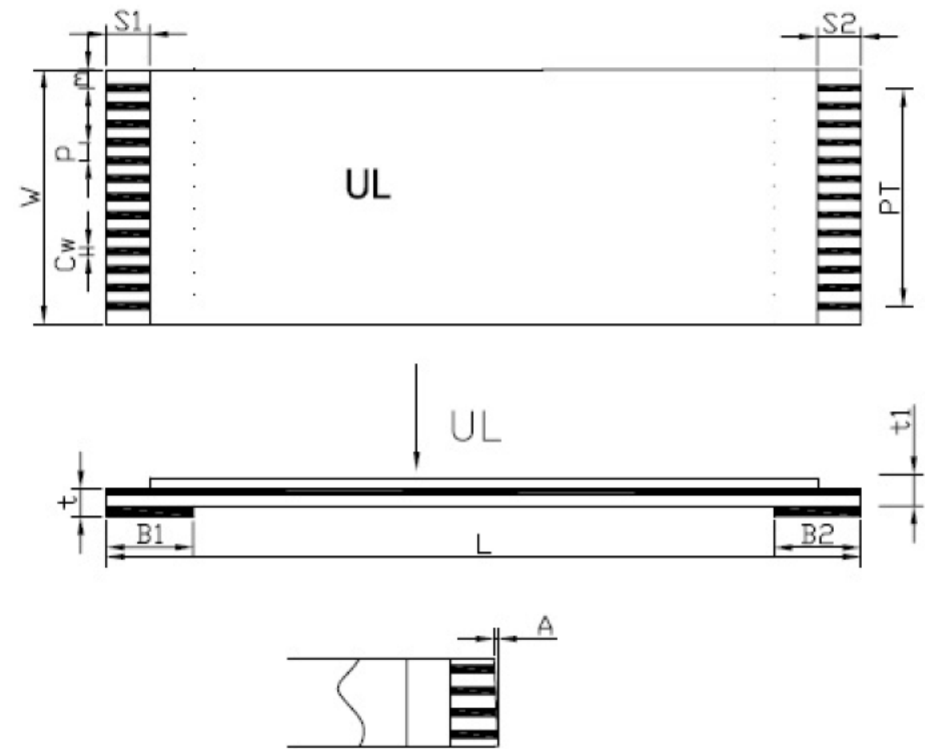

XX- 04-20PIN  
 YYY- lenght (020=20mm; 110=120mm)

TOLERANCE		
SCALE	UNIT mm	
DRAW Valter	DATE 13.3.2018	TITLE SM C01 0810 XX L=YYY, 1,0mm TypeA-A
CHECK Vanda	REV	
		DESCRIPTION Flexible Flat Cable FCC, RM:1,00mm Type A-A, 60V, 80°C