


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2011.08.27	尹晖

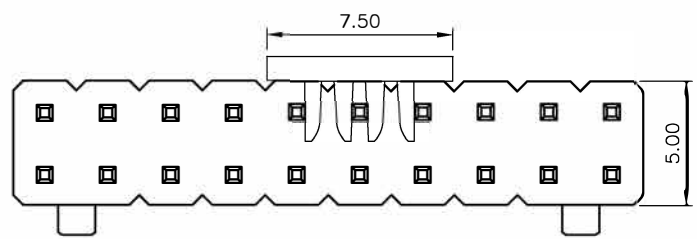

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Min.Ω
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m MaxΩ
 Operating Temperature: -40°C to +105°C




Materials

Contact Material: Brass/Gold
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

All materials must be GP materials

Recommended P.C.Board

Hole Layout
 (Tolerance±0.05)

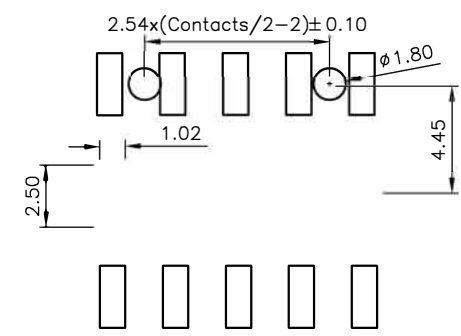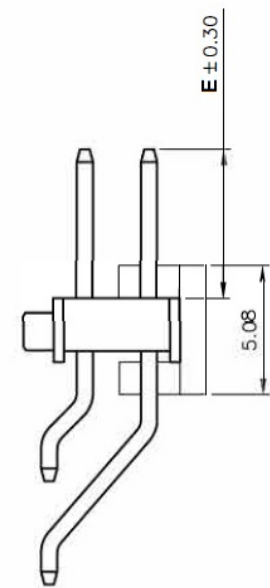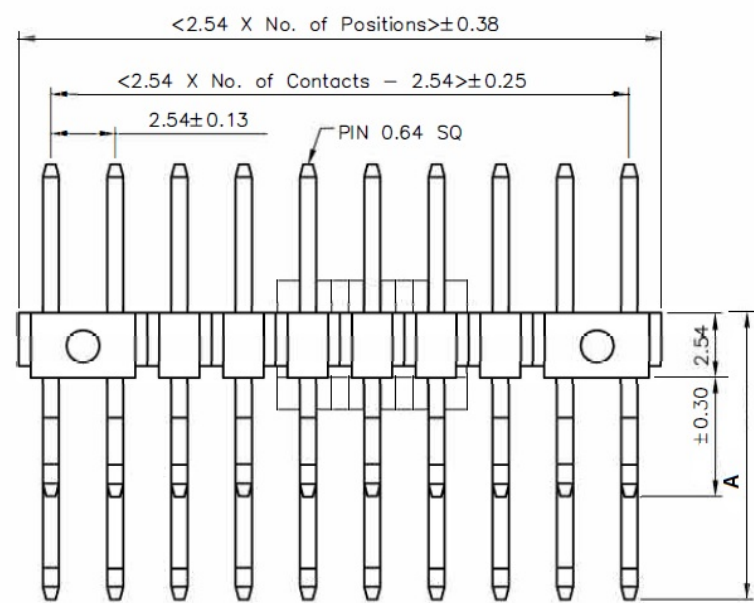

GENERAL TOLERANCE	
X.° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX° ± 2.0°	.XX ± 0.15
.XXX° ± 1.0°	.XXX ± 0.10

DESIGN:	DATE: 2012..02.02
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	SM C02 2105 XX BH
PART NO.	SM C02 2105 XX BH

TITLE.	2.54 PIN HEADER DUAL ROW SMT TYPE BASE 2.54H
--------	--

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1