

Specifications

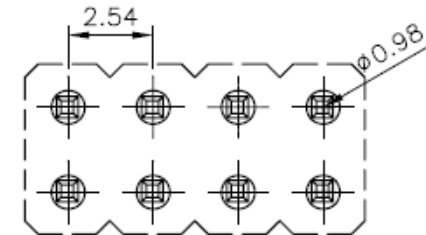
Current Rating: 3Amp
 Insulation Resistance: 1000M Min. Ω
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Max Ω
 Operating Temperature: -40°C to $+105^\circ\text{C}$



Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 PBT
 All materials must be ROHS materials

Recommended P.C.Board

Hole Layout
 (Tolerance: ± 0.05)



TOLERANCE			
SCALE	UNIT mm		
DRAW Johnson	DATE 12.6.2021	TITLE	
CHECK Fisher	REV	SM C02 2290 XX BSPF; C=	
		DESCRIPTION	
		Press Fit DIP; Dual Rows RM2,54mm	