


A/B/C Szie can be made according to customer request



Recommended PCB Layout

- Notes:
- Electrical Characteristics:
 - Contact Resistance: 20mΩ Max
 - Dielectric Withstanding Voltage: 600V AC(rms) for 1 Minute
 - Insulation Resistance: 1000mΩ Min
 - Current Rating: 1.5A
 - Voltage Rating: 250V AC rms
 - Environment Characteristics:
 - Temperature: -40°C ~ +105°C
 - Materials:
 - Contact Materials: Copper Alloy
 - Contact Plating: Tin or Gold plate
 - Insulator Materials: PBT, Black, UL94V-0 or High temperature Materials like PA46/PA6T/PA9T

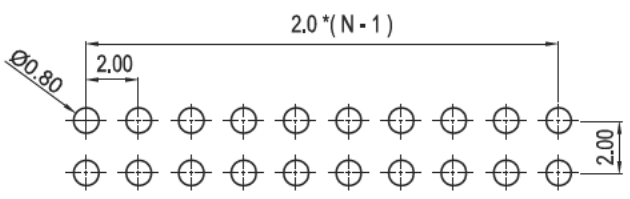

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE: 2020.02.28
CHECK:	DATE: 2020.03.02
AUDIT:	DATE: 2020.03.02
APPROVE:	DATE: 2020.03.02

DATE: 2020.02.28
DATE: 2020.03.02
DATE: 2020.03.02
DATE: 2020.03.02

DWG. NO.:	PART NO.:
SM C02 6200 XX BR	

TITLE: 2.00mm Pin header, Double Row, R/A type

REV.: 01	UNIT.: mm	SCALE.: 1:1	PAGE.: 1/1
----------	-----------	-------------	------------