

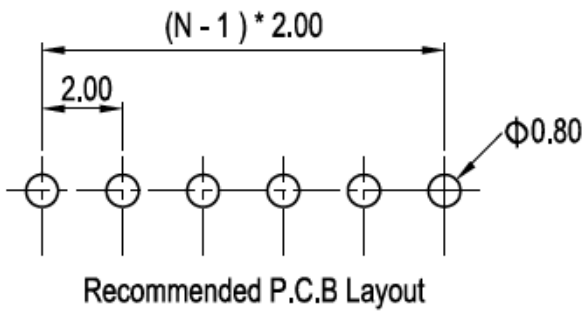


PBR Series - Single Row

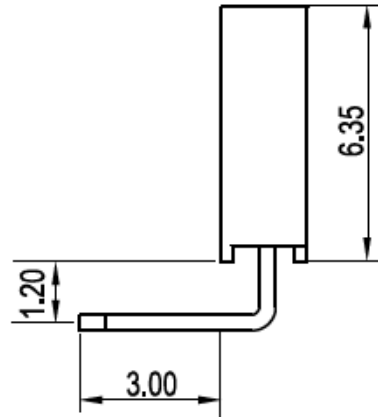

Notes:

1. Electrical Characteristics:

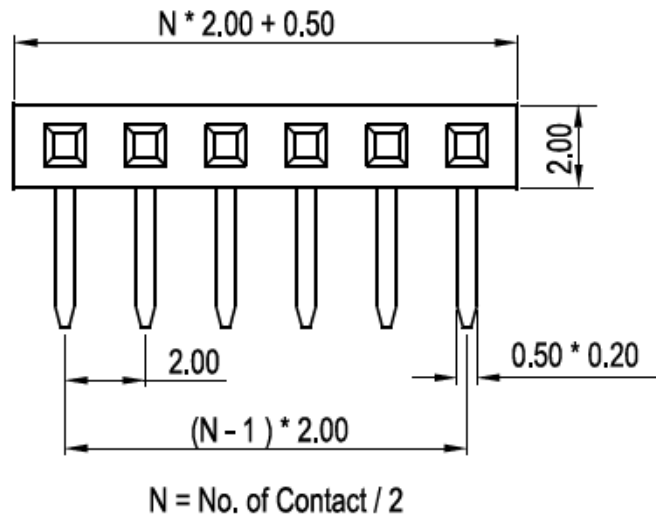

1. 1 Contact Resistance: 20mΩ Max
1. 2 Dielectric Withstanding Voltage: 600V AC(rms) for 1 Minute
1. 3 Insulation Resistance: 1000mΩ Min
1. 4 Current Rating: 1.5A
1. 5 Voltage Rating: 250V AC rms

2. Environment Characteristics:

2. 1 Temperature: -40°C ~ +105°C

3. Materials:

3. 1 Contact Materials: Copper Alloy
3. 2 Contact Plating: Tin or Gold plate
3. 3 Insulator Materials: PBT, Black, UL94V-0  
or High temperature Materials like PA46/PA6T/PA9T

TOLERANCE		
SCALE	UNIT mm	
DRAW Walter	DATE 20.1.2022	TITLE
CHECK Vanda	REV	<b>SM C02 6801 XX R</b>
		DESCRIPTION
		Female Header RM2,00 Single Row Right Angle