

REV.	LOOKS.	DESCRIPTION	DATE	DRAWN
01			2011.04.30	

INITIAL RELEASE.





**Specifications**

Current Rating: 1Amp  
 Insulation Resistance: 1000M Min.  $\Omega$   
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20m Max  $\Omega$   
 Operating Temperature: -40°C to +105°C

**Materials**

Contact Material: Brass  
 Insulation Material: Polyester, NYLON-6T  
 UL 94V-0  
 All materials must be GP

**RECOMMENDED P.C.B LAYOUT**

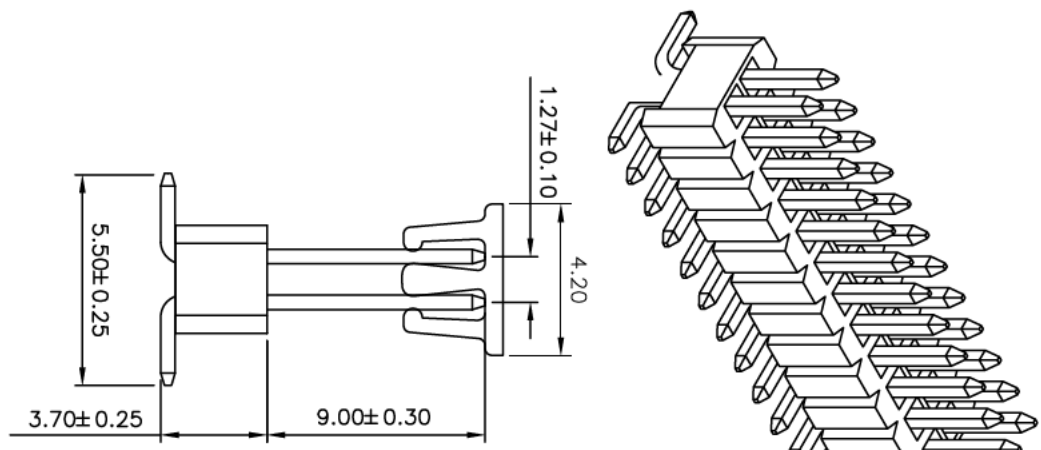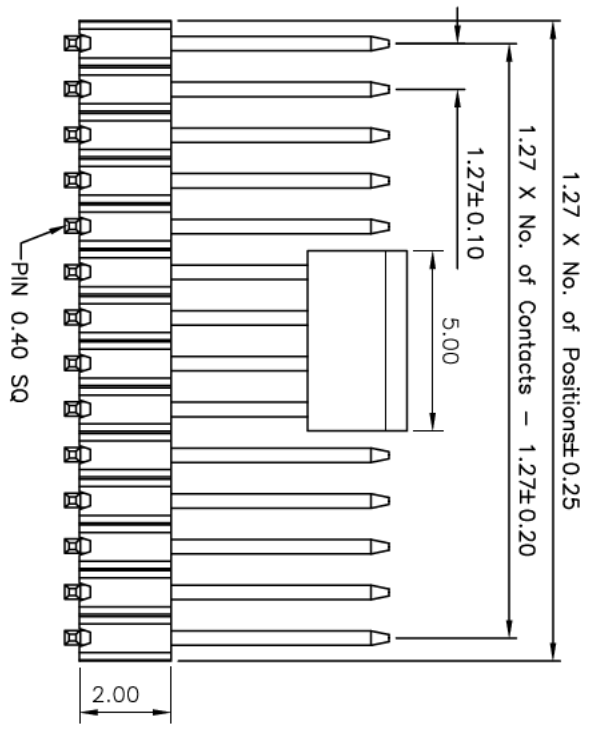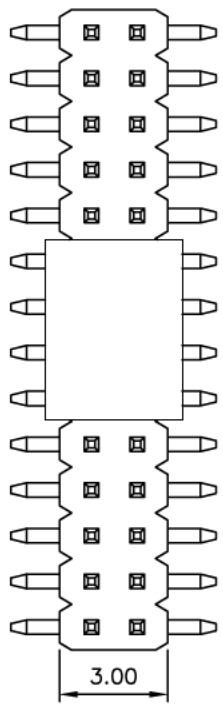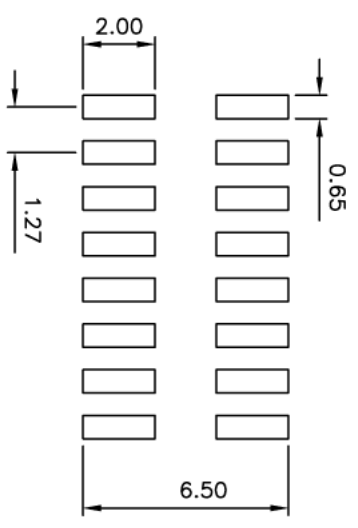

**GENERAL TOLERANCE**

X. ± 5.0°	X.	± 0.30
.X° ± 3.0°	.X	± 0.25
.XX° ± 2.0°	.XX	± 0.15
.XXX° ± 1.0°	.XXX	± 0.10

**DESIGN:**

CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

**PART NO.**

SM C02 1271 08 BD: 1.27x1.27;E=9.0;  
 With Cap REEL

**TITLE:**

Pin Header Dual Rows, Single Insulator, SMT, Packing T&R+CAP, XX = number of poles

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

A

B

C

D

E

F

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F