


SPECIFICATIONS

Current Rating: 2A
 Contact Resistance: 20MΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 600V AC / Minute
 Operation Temperature: -40°C to +105°C
 Contact Materials: Brass
 Contact Plating: Au Or Sn over 50 Ni
 Insulator Materials: PBT / PA6T..

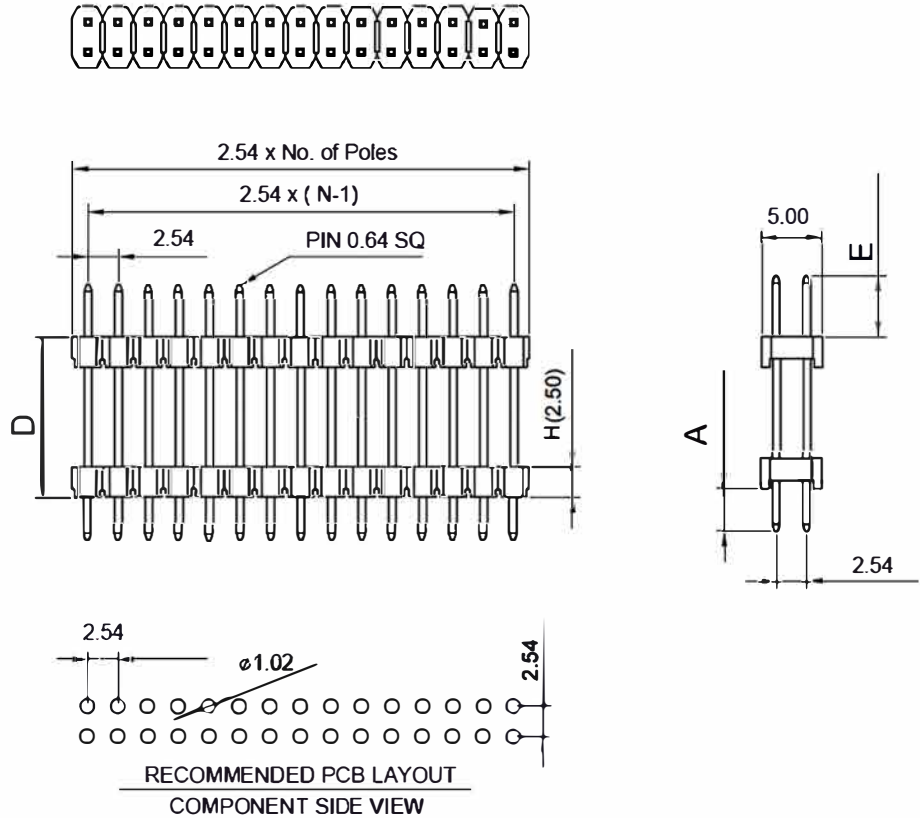


SM C02 2200 XX FS (A= ,C= ,D= ,E=) - Y

XX - Contact No.:2-80

Y- Packaging: unmarked - bag

- T - Tube
- R - Reel Packing
- P - Pad + Tube Packing
- Q - Pad + Reel Packing



Example: SM C02 2200 10 FS (A=3,0; C=19,9; D=10,5; E=6,4) - T

= Header Dual Rows Dual Insulator; RM2,54; 10 Contacts;
 Dimension: A=3,0mm; C=19,9mm; D=10,5mm; E=6,4mm
 Pacakging: Tube

C=21,4mm; D=12,1 mm; E=6,0mm; A=3,3mm

E			Unlts	mm	Scale	2:1	Drawing By	Date	SCHMID-M	
D			Tolerance Unless Otherwise Specified			Revised By	Date	01.06.2018		
C								01.06.2018	Sheet	1 of 1
B									SM C02 2200 XX FS; C=21,4	
A	RELEASED	01/06/18					Approval By	Date	Third Angle Projection	Title
REV	DESCRIPTION.	Date					01.06.2018		⊕	
	1	2	3	4	5	6	7	8	REV	A