



SPECIFICATIONS

Current Rating: 2A
 Contact Resistance: 20MΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 600V AC / Minute
 Operation Temperature: -40°C to +105°C
 Contact Materials: Brass
 Contact Plating: Au Or Sn over 50 Ni
 Insulator Materials: PBT / PA6T..

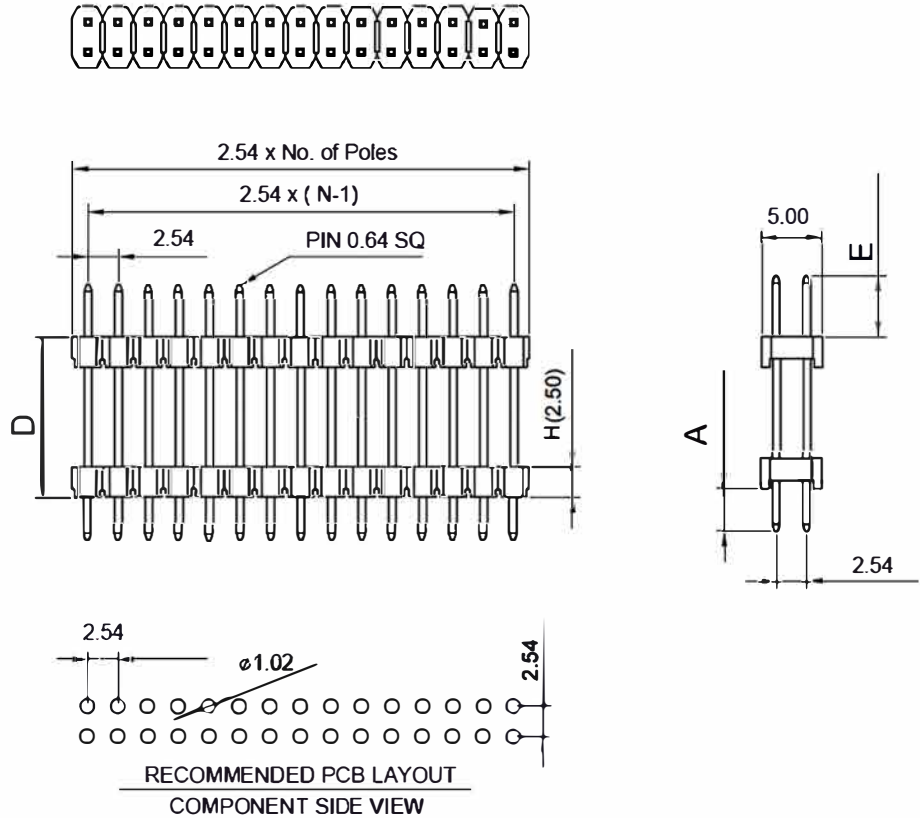

SM C02 2200 XX FS (A= ,C= ,D= ,E=) - Y

- XX - Contact No.:2-80
- Y- Packaging: unmarked - bag
- T -Tube
- R - Reel Packing
- P - Pad + Tube Packing
- Q - Pad + Reel Packing



Example: SM C02 2200 10 FS (A=3,0; C=19,9; D=10,5; E=6,4) - T

= Header Dual Rows Dual Insulator; RM2,54; 10 Contacts;
 Dimension: A=3,0mm; C=19,9mm; D=10,5mm; E=6,4mm
 Pacakging: Tube

C=29,0mm; D=19,7mm; E=6,0mm; A=3,3mm

E			Unlts	mm	Scale	2:1	Drawing By	Date	SCHMID-M	Sheet	1 of 1	SM C02 2200 XX FS; C=29,0
D			Tolerance Unless Otherwise Specified			Revised By	Date	Title				
C			.X ~ ±0.30			Approval By	Date		Third Angle Projection	REV	A	
B			.XX ~ ±0.25					Date				01.06.2018
A	RELEASED	01/06/18	.XXX ~ ±0.20			Date	01.06.2018		Title	REV	A	
REV	DESCRIPTION.	Date	Angle ~ ± 3°									