
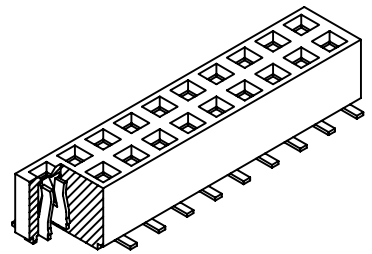


1 2 3 4 5 6 7 8

A

A

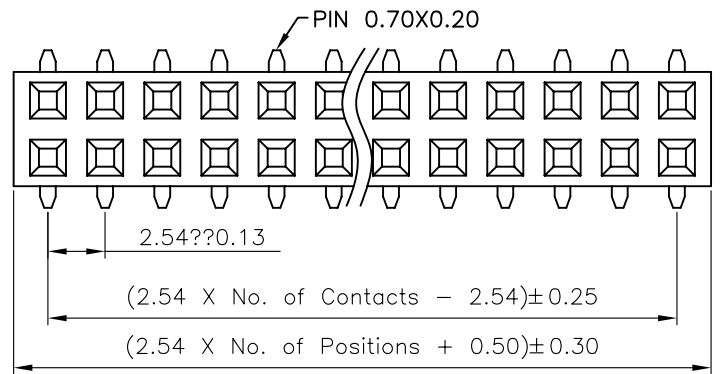


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Min. Ω
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20m Max Ω
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 PA46
 All materials must be GP materials

B



B

RECOMMENDED P.C.B LAYOUT
 FOR TOP ENTRY

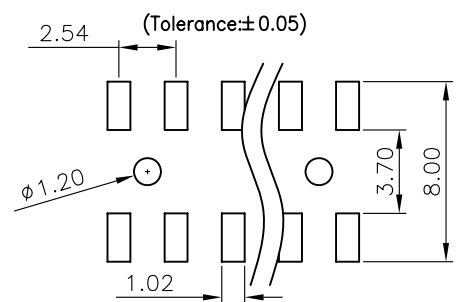

C

C

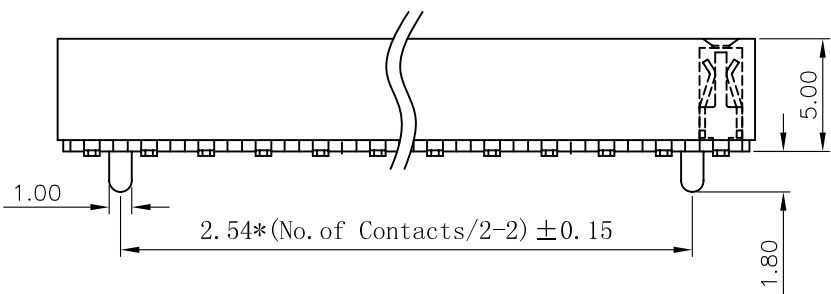


Unless Otherwise specified tolerance
 X. ± 0.35 X. XX: ± 0.20
 X. X: ± 0.25 X. XXX: ± 0.15



SCALE: UNIT: mm
 DRAW Walter DATE 14/12/2017
 CHECK Vanda DATE 14/12/2017

TITLE:
 SM C02 2818 XX PA H=5,0mm



PRODUCT NO:

REV	DESCRIPTION	DATE
1		

1 2 3 4 5 6 7 8