



1 2 3 4 5 6 7 8


A

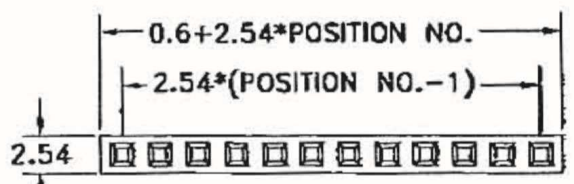


B

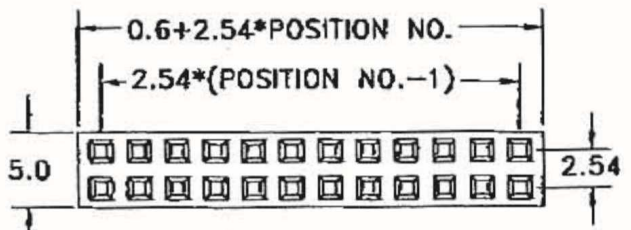

C

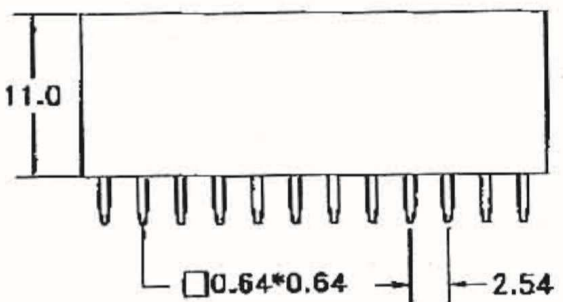

D

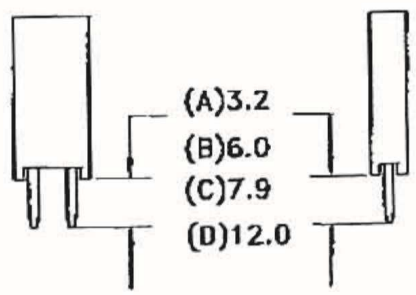


E

SPECIFICATION

Electric
 Current Rating: 1Amp
 Contact Resistance: 30m ohms Max.
 Insulation Resistance: 3000 Mohms Min.
 Dielectric Withstanding Voltage: 500V AC/Minute.
 Operating Temperature: -40° C.to +105° C

Material

Insulator: PBT, Glass Reinforced, Rated UL94V-0
 Contact: Brass



RECOMMENDED P.C.B LAYOUT

Y=A single row Y=B dual rows
 Z= lenght terminal (A=3,2mm; B=6,0mm; C=7,9mm; D=12,0mm)



UNIT

SCALE

PART NAME

MM

3 : 1

2.54mm FEMALE HEADER
 STRAIGHT H=11.0mm

H

2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.3

SM C02 2822 XXYZ

A

1 2 3 4 5 6 7 8