


**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T  
 All materials must be GP materials

SM C02 2826 XX A SMT -Y

- XX: Contact No.:03-40
- Y- Without - Tube Packing
- R - Reel Packing
- P - Pad + Tube Packing
- Q -Pad + Reel Packing

Recommended P.C.Board  
 Layout

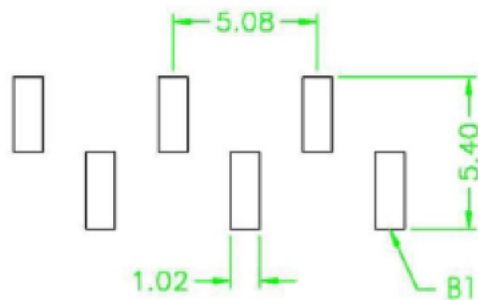

TOLERANCE		<b>SCHMID-M</b>
SCALE	UNIT mm	
DRAW Jonson	DATE 8.82012	TITLE <b>SM C02 2826 XX A SMT</b>
CHECK Fisher	REV	DESCRIPTION Female Header RM2,54 Single row H=7,1mm; SMT