


Cir- cuits	Dimension (mm)	
	L1	L2
3	5.08	8.12
4	7.62	10.66
5	10.16	13.20
6	12.70	15.74
7	15.24	18.28
8	17.78	20.82
9	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92
24	58.42	61.46
25	60.96	64.00
26	63.50	66.54
27	66.04	69.08
28	68.58	71.62
29	71.12	74.16
30	73.66	76.70
31	76.20	79.24
32	78.74	81.78
33	81.28	84.32
34	83.82	86.86
35	86.36	89.40
36	88.90	91.94
37	91.44	94.48
38	93.98	97.02
39	96.52	99.56
40	99.06	102.10

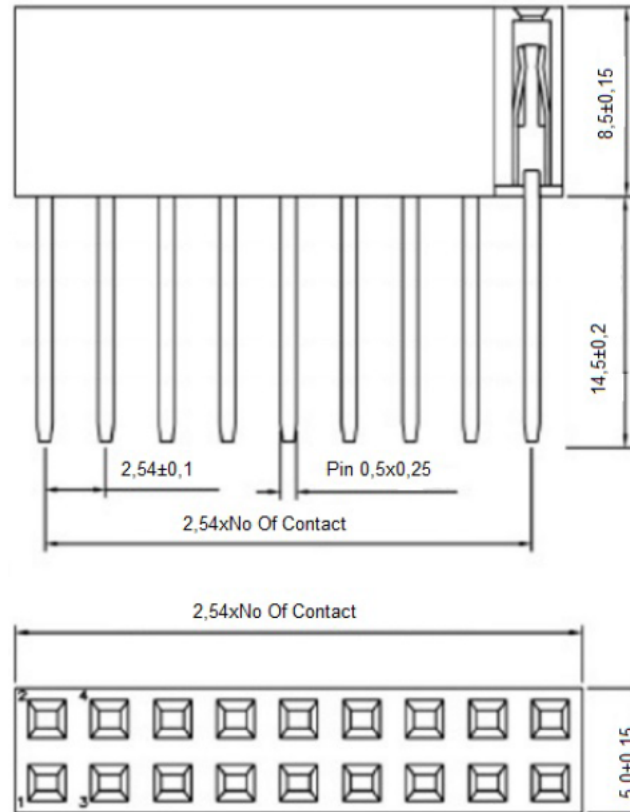


### SPECIFICATIONS

Current Rating: 3 Amp.  
Insulation Resistance: 5000 Megohms min.

Dielectric withstanding: AC 500V.  
Operation Temperature: -40°C to +105°C  
Max. Processing Temp: 230°C for 30-60 Seconds  
(260°C for 10 Seconds)

Contact : Phosphor Bronze  
Insulator Material: Polyester, UL94v-0  
Nylon-6T

VOLTAGE: AC 500V FOR ONE MINUTE  
CONTACT RESISTANCE: 20MΩ Max.  
SOLDERING TEMPERATURE: 260 DEGREE C FOR 5 SECONDS.

TOLERANCE		<b>SCHMID-M</b>
SCALE	UNIT mm	
DRAW	Walter	TITLE
CHECK	Vanda	SM C02 2826 XX BS A:14,5 H:8,5
		DESCRIPTION
		Header Female Straight 2 rows RM2,54