
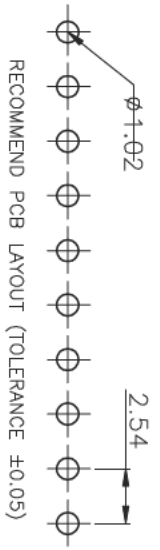
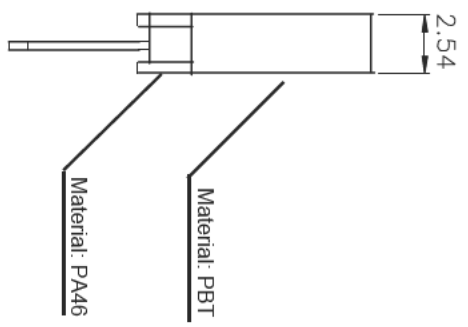


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODES	CJJ 11/18/2014	~	

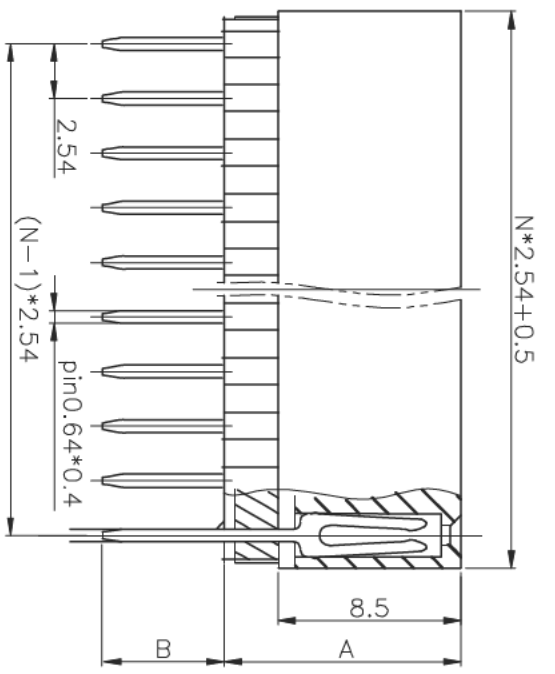

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 50m $\Omega$  Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000M $\Omega$  Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: -40°C~+105°C.
  - RESISTANCE TO SOLDERING HEAT: 260 $\pm 5$ °C, 5 $\pm 0.5$ s.

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	UNITS	TITLE
X. $\pm 0.60$	X. $\pm 5^\circ$		mm	FEMALE HEADER PITCH
X. $\pm 0.38$	X. $\pm 3^\circ$		A4	2.54mm V/T STACK TYPE
.XX $\pm 0.25$	.XX $\pm 2^\circ$			
DRAWING TYPE CUSTOMER		SHEET 1 OF 1		
SCALE 1:1		DRAWING NO.		

SM C02 2851 XX ASA