

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01				

1.Specifications






Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature:-40°C to +105°C

2.Materials

Contact Material: Phosphor Bronze
 Gold Flash /Tin
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

Recommended P.C.B Layout

(Tolerance:±0.05)

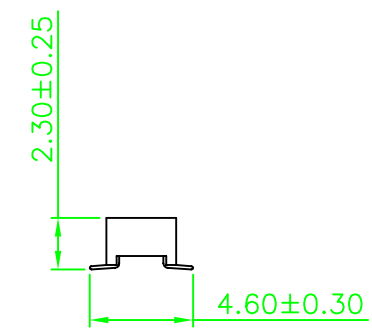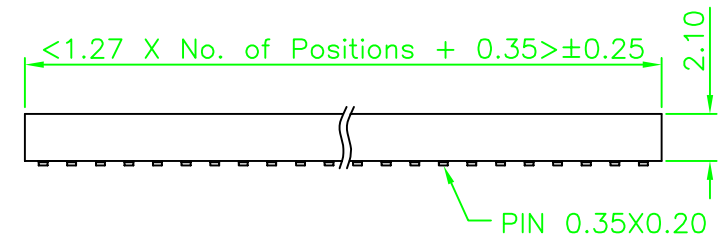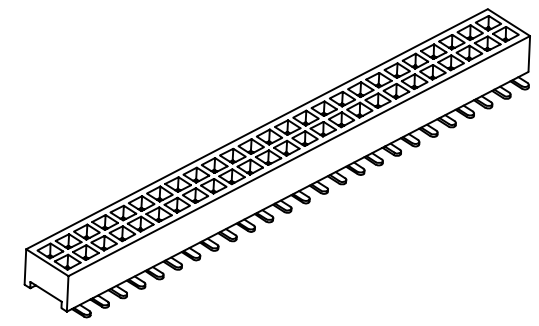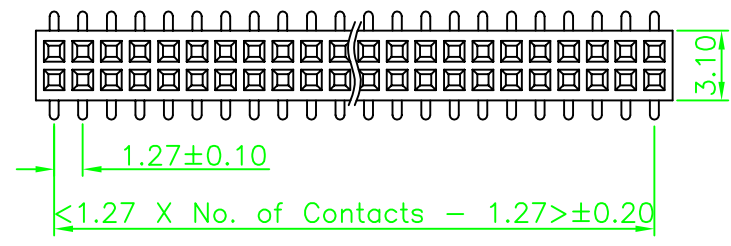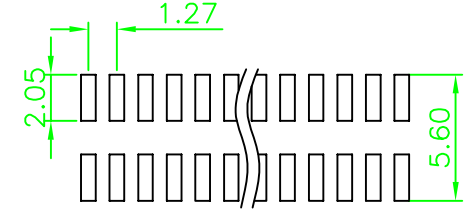

GENERAL TOLERANCE	
X.° ± 5'	X. ± 0.30
.X° ± 2'	.X ± 0.20
.XX° ± 1'	.XX ± 0.15
.XXX° ± 0.5'	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.
PART NO
SM C02 4828 XX BD; H=2,1

TITLE.
 1.27 FEMALE HEADER
 DUAL ROWS SMT TYPE
 BASE 2.00H

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1