


1 2 3 4 5 6 7 8

A

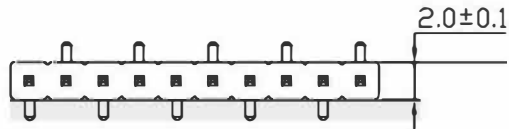

$A = 2.0 * (\text{No of Space})$
 $B = A + 2.0$

SPECIFICATIONS



Current Rating: 2 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)

B

MATERIAL&FINISH

Contact: Brass
 Insulator Material: Nylon 6T
 Color: Black
 Finish: Gold Flash Plated Over Nickel

C

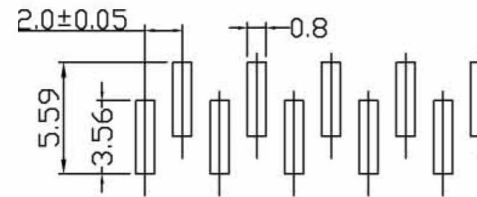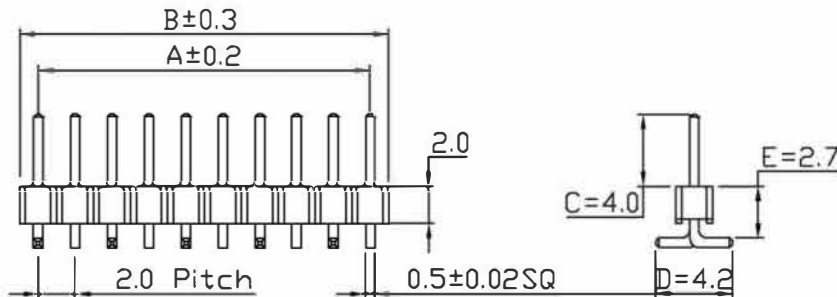

P.C.Board Layout

D

E

F

G



UNIT

SCALE

PART NAME

MM

2:1

2.0x2.0 Pin Header Single Row H=2.0
 SMT A Type(C=4.0 D=4.2 E=2.7)

H

2003/07/15

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.3

SM C02 6100 XX AZ

A

1

2

3

4

5

6

7

8