


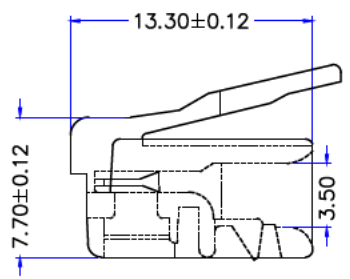


MARK	NO.	DATE	DRAW	APPROVE



**FEATURES:**

**1 Electrical Test:**

- A. 250V ac max, at 2A.
- B. Dielectric with standing 1000V/DC/min, <0.5A.
- C. Insulation Resistance: >500M Ω, 1000V./min
- D. Contact Resistance: <20M Ω

**2 Mechanical:**

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 2000 mating cycles.

BLADE:	A3	B4	B7	B9	B20					
Drawing										
Mark										
GOLD PLATING	0U"	FU"	2U"	3U"	6U"	15U"	30U"	50U"	/	//
Mark										



DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL PC	PART NO	
.X±0.20	.X° ±5°	TITLE <b>SM C04 0050 XX R</b>		
.XX±0.12	.XX° ±2°			
APPROVAL	CHECKED , <b>Vanda</b>	DRAWN <b>Walter</b>	SCALE <b>FULL</b>	DATE <b>2019. 1. 19</b>
		PROJ	CATALOG NO.	