

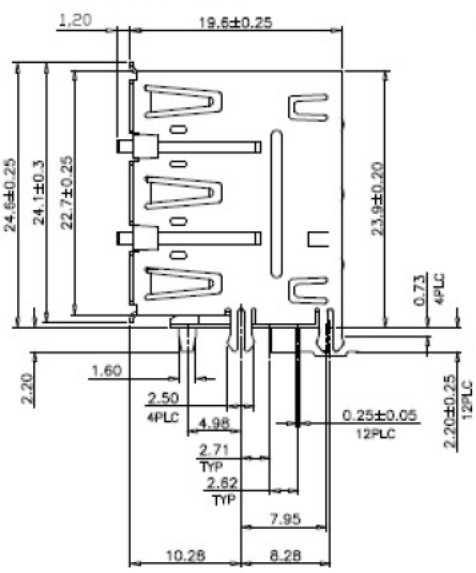


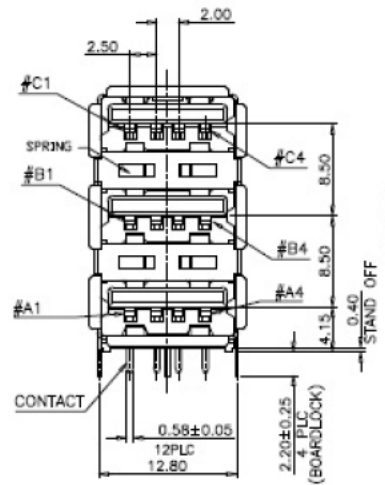

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

PCB BOARD
MOUNTING PANEL CUTOUT



- NOTES:
- MATERIAL:
 - HOUSING:PA6T+30% G/F,COLOR:BLACK, UL94V-0;
 - CONTACTS: PHOSPHOR BRONZE
 - SHELL :PHOSPHOR BRONZE OR SK7
 - ISOLATED:PHOSPHOR BRONZE OR SK7
 - REAR SHELL :SPCC
 - FINISH:
 - CONTACT:
 - GOLD(SEE TABLE) PLATING ON CONTACT AREA, 100u" MIN. MATTE-TIN PLATING ON SOLDER TAIL AREA,50u" MIN. NICKEL UNDERPLATING OVERALL,
 - SHELL:
 - 100u" MIN. NICKEL UNDERPLATING.
 - ISOLATED:SHELL: 100u" MIN. NICKEL PLATED
 - REAR SHELL:100u" MIN. NICKEL PLATED.
 - ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.5Ampere Maximum
 - VOLTAGE: 30V AC.
 - CONTACT RETENTION FORCE:0.7KGFMINIMUM.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 - INSULATION RESISTANCE: 1000MEG OHMS MINIMUM.
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V AC AT SEELEVEL.
 - TEMPERATURE: -55°C~85°C .



TOLERANCE				
SCALE	UNIT mm			
DRAW	Walter	DATE	3.3.2016	TITLE SM C04 8317 04 DFH
CHECK	Vanda	REV		
		DESCRIPTION USB A ttyp, Triple, Receptacle, R/A,THT		